

BR 87-20



**!Heat-High Voltage-Peak-Protected
Does Not Produce Frequency Interference**

Marine Grade Downlight

Optional

Special Arrangements Can Be Made For Projects Including Different Sizes, Materials, Material Colors



Optional


Main Light And Emergency
OR
Second Color

Product Specifications

- Power Consumption.....: 12 Watt
- Standart Voltage Internal Driver.....: 24 VDC Protected 60 VDC
- Optional Driverless.....: Current 3 OR 18 V 300 -1.500 ma
- Light Source Led.....: High Power
- Dimmable.....: PWM, Voltage, Current
- Luminous Flux.....: 2.700 Lumens

Temp Control	Does Not Cause fire	Voltage Limit	Does Not Cause Frequency

Dimensions

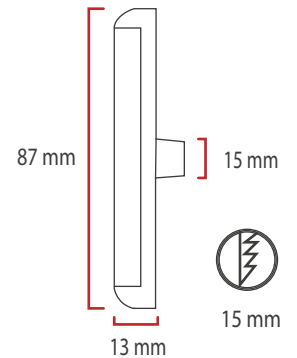

Material Colors



BRONZE

Light Angle




And Other Ral Codes


These Dimensions Can Be Changed Optionally

The Driver Is Protected In An Aluminum Housing

Optional Connection



Standart Connection




Area Of Application

IP 40 Interior

IP 65 Exterior



Light Colors



Certifications

