


CR 120-38



STEIN
MARINE LIVING

**!Heat-High Voltage-Peak-Protected
Does Not Produce Frequency Interference**

Marine Grade Downlight

Optional

Special Arrangements Can Be Made For Projects Including Different Sizes, Materials, Material Colors



Optional


Main Light And Emergency
OR
Second Color

Product Specifications

- Power Consumption.....: 24 Watt
- Standart Voltage Internal Driver.....: 24 VDC Protected 60 VDC
- Optional Driverless.....: Current 3 OR 18 V 300 -1.500 ma
- Light Source Led.....: High Power
- Dimmable.....: PWM, Voltage, Current
- Luminous Flux.....: 5.400 Lumens

Temp Control	Does Not Cause fire	Voltage Limit	Does Not Cause Frequency

Dimensions

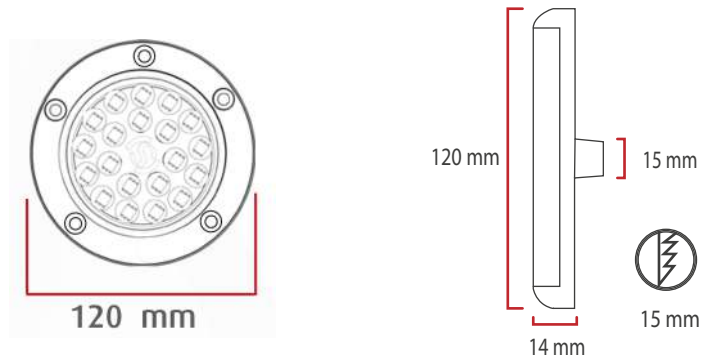

These Dimensions Can Be Changed Optionally


The Driver Is Protected In An Aluminum Housing

Material Colors




316 STAINLESS STEEL

Light Angle




And Other Ral Codes

Optional Connection



Standart Connection




Area Of Application

IP 40 Interior

IP 65 Exterior



Light Colors



Certifications

