

# GLASS 100

!Heat-High Voltage-Peak-Protected  
Does Not Produce Frequency Interference



Marine Grade Downlight



## Optional

Special Arrangements Can Be Made For Projects Including Different Sizes, Materials, Material Colors

## Optional


Main Light And Emergency  
OR  
Second Color

## Product Specifications

- Power Consumption.....: 8 Watt
- Standart Voltage Internal Driver.....: 24 VDC Protected 60 VDC
- Optional Driverless.....:
- Light Source Led.....: Mid Power OR High Power
- Dimmable.....: PWM, Voltage, Current
- Luminous Flux.....: 500 - 1.000 - 1.350 Lumens

Temp Control Does Not Cause fire Voltage Limit Does Not Cause Frequency

## Dimensions

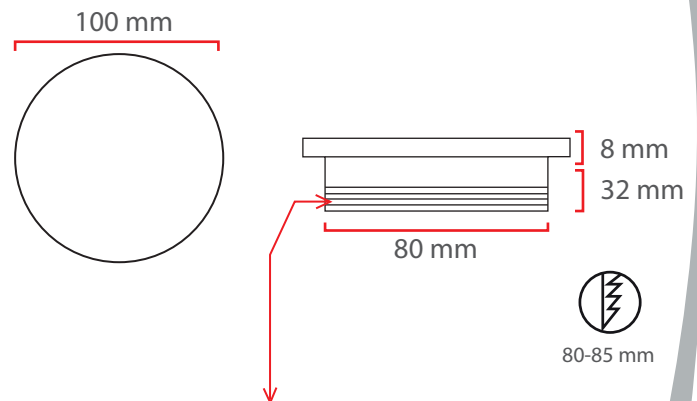


The Driver Is Protected In An Aluminum Housing

## Material Colors



## Light Angle



## Area Of Application

Exterior IP65 Interior

## Optional Connection



## Standart Connection




## Mounting



You can easily assemble the product by stretching the springs and inserting it into the hole you've pierced

## Light Colors



## Certifications

