

**!Heat-High Voltage-Peak-Protected
Does Not Produce Frequency Interference**

Marine Grade Downlight

Optional

Special Arrangements Can Be Made For Projects Including Different Sizes, Materials, Material Colors







Optional


Main Light And Emergency
OR
Second Color

Product Specifications


- Power Consumption.....: 0.5 Watt
- Standart Voltage Internal Driver.....: 24 VDC Protected 60 VDC
- Optional Driverless.....: Current 3 OR 18 V 300 -1.500 ma
- Light Source Led.....: Mid Power OR High Power
- Dimmable.....: PWM, Voltage, Current
- Luminous Flux.....: 70 Lumens

Temp Control  Does Not Cause fire  Voltage Limit  Does Not Cause Frequency 

Dimensions

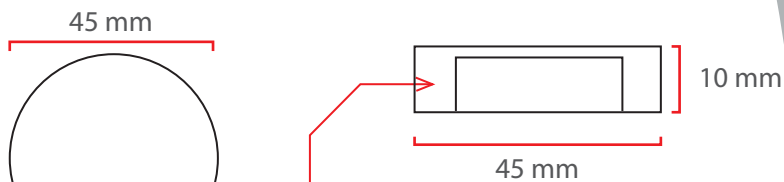

Light Angle



The Driver Is Protected In An Aluminum Housing


Material Colors



Optional Connection



Standart Connection




Mounting



Area Of Application
IP 40 Interior Optional IP65

Light Colors



Certifications

