

Mars 100-120




**!Heat-High Voltage-Peak-Protected
Does Not Produce Frequency Interference**

Marine Grade Downlight



Optional

Special Arrangements Can Be Made For Projects Including Different Sizes, Materials, Material Colors

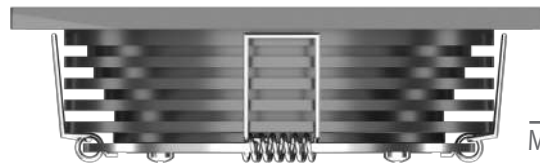

Optional



Main Light And Emergency OR Second Color

Product Specifications

- Power Consumption.....: 10 Watt
- Standart Voltage Internal Driver.....: 24 VDC Protected 60 VDC
- Optional Driverless.....:
- Light Source Led.....: Mid Power OR High Power
- Dimmable.....: PWM, Voltage, Current
- Luminous Flux.....: 1400 Lumens

Temp Control Does Not Cause fire Voltage Limit Does Not Cause Frequency

Dimensions

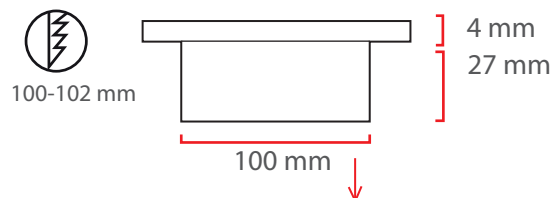


The Driver Is Protected In An Aluminum Housing

Material Colors

And Other Ral Codes


Light Angle



Area Of Application

IP 40 Interior Optional IP65

Optional Connection



Standart Connection



Light Colors

Certifications