

Mars 60-80




**!Heat-High Voltage-Peak-Protected
Does Not Produce Frequency Interference**

Marine Grade Downlight



Optional

Special Arrangements Can Be Made For Projects Including Different Sizes, Materials, Material Colors

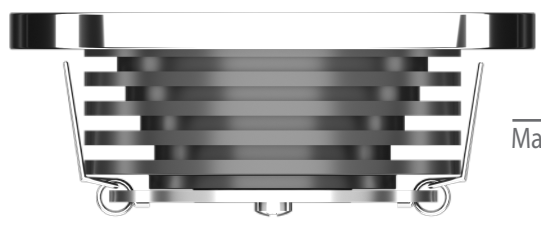

Optional



Main Light And Emergency OR Second Color

Product Specifications

- Power Consumption.....: 5 Watt
- Standart Voltage Internal Driver.....: 24 VDC Protected 60 VDC
- Optional Driverless.....:
- Light Source Led.....: Mid Power OR High Power
- Dimmable.....: PWM, Voltage, Current
- Luminous Flux.....: 700 Lumens

Temp Control Does Not Cause fire Voltage Limit Does Not Cause Frequency

Dimensions

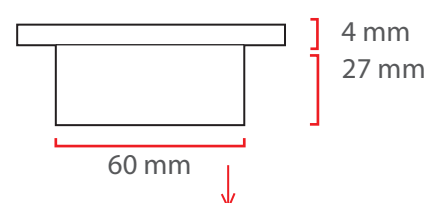


Material Colors




And Other Ral Codes

Light Angle




The Driver Is Protected In An Aluminum Housing

Optional Connection



Standart Connection




Area Of Application

IP 40 Interior Optional IP65



Light Colors

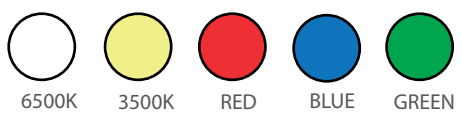

Certifications

