

Mars 70-90


!Heat-High Voltage-Peak-Protected
Does Not Produce Frequency Interference

Marine Grade Downlight



Optional

Special Arrangements Can Be Made For Projects Including Different Sizes, Materials, Material Colors

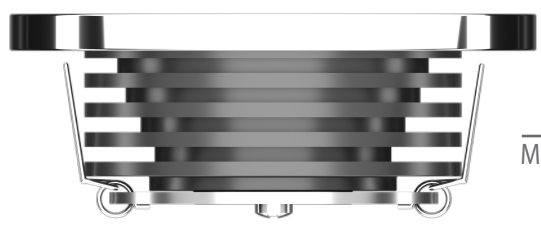

Optional



Main Light And Emergency OR Second Color

Product Specifications

- Power Consumption.....: 6 Watt
- Standart Voltage Internal Driver.....: 24 VDC Protected 60 VDC
- Optional Driverless.....:
- Light Source Led.....: Mid Power OR High Power
- Dimmable.....: PWM, Voltage, Current
- Luminous Flux.....: 840 Lumens

Temp Control Does Not Cause fire Voltage Limit Does Not Cause Frequency

Dimensions

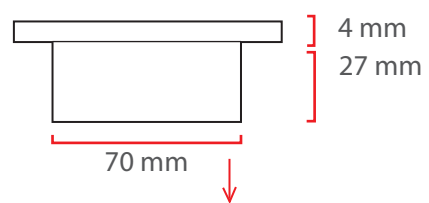


The Driver Is Protected In An Aluminum Housing

Material Colors



And Other Ral Codes


Light Angle



Optional Connection



Standart Connection



Area Of Application

IP 40 Interior Optional IP65



Light Colors



Certifications



IP40 OR IP65 CE