

READ A AS -K2



**!Heat-High Voltage-Peak-Protected
Does Not Produce Frequency Interference**

Marine Grade Downlight



Optional
Main Light And Emergency
OR
Second Color


Product Specifications

- Power Consumption.....: 3 Watt
- Standart Voltage Internal Driver.....: 24 VDC Protected 60 VDC
- Optional Driverless.....: Current 3 OR 18 V 300 -1.500 ma
- Light Source Led.....: Mid Power OR High Power
- Dimmable.....: PWM,Voltage, Current
- Luminous Flux.....: 300 Lumens

Temp Control Does Not Cause fire Voltage Limit Does Not Cause Frequency


Material Colors

Light Angle
15-25 OR 30-50
And Other Ral Codes

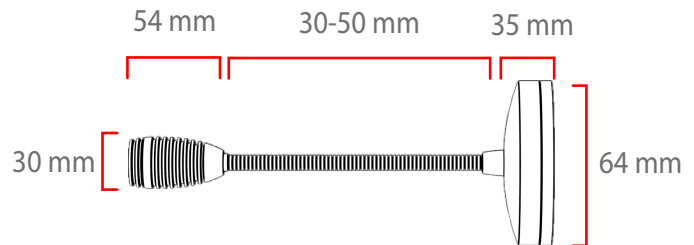


These Dimensions Can Be Changed Optionally The Driver Is Protected In An Aluminum Housing

Optional Connection



Standart Connection



Area Of Application


IP 40 Interior

IP 65 Exterior

Optional

Special Arrangements Can Be Made For Projects Including Different Sizes,Materials,Material Colors

Light Colors



Certifications

