

READ A OB -K1

**!Heat-High Voltage-Peak-Protected
Does Not Produce Frequency Interference**



Marine Grade Downlight



Optional
Main Light And Emergency
OR
Second Color

Product Specifications

- Power Consumption.....: 3 Watt
- Standart Voltage Internal Driver.....: 24 VDC Protected 60 VDC
- Optional Driverless.....: Current 3 OR 18 V 300 -1.500 ma
- Light Source Led.....: Mid Power OR High Power
- Dimmable.....: PWM,Voltage, Current
- Luminous Flux.....: 300 Lumens

Dimensions


- Temp Control
- Does Not Cause fire
- Voltage Limit
- Does Not Cause Frequency

Material Colors

Light Angle


And Other Ral Codes

BLACK PLATED	GOLD PLATED	316 L POLISHED
ANTIC	WHITE PLATED	316 L STAINE

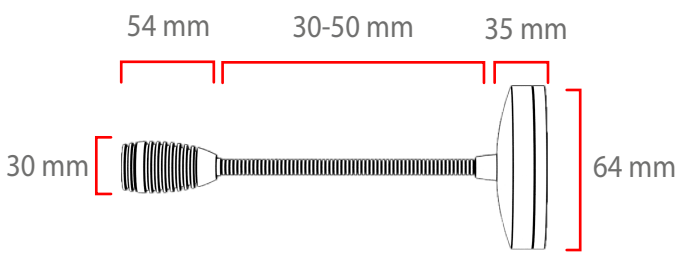


These Dimensions Can Be Changed Optionally The Driver Is Protected In An Aluminum Housing

Optional Connection



Standart Connection



Area Of Application

IP 40 Interior	IP 65 Exterior
----------------	----------------

Optional

Special Arrangements Can Be Made For Projects Including Different Sizes,Materials,Material Colors

Light Colors

6500K	3500K	RED	BLUE	GREEN

Certifications