

READ UB -K2



**!Heat-High Voltage-Peak-Protected
Does Not Produce Frequency Interference**

Marine Grade Downlight



Optional
Main Light And Emergency
OR
Second Color

Product Specifications


- Power Consumption.....: 3 Watt
- Standart Voltage Internal Driver.....: 24 VDC Protected 60 VDC
- Optional Driverless.....: Current 3 OR 18 V 300 -1.500 ma
- Light Source Led.....: Mid Power OR High Power
- Dimmable.....: PWM,Voltage, Current
- Luminous Flux.....: 300 Lumens

Temp Control Does Not Cause fire Voltage Limit Does Not Cause Frequency

Material Colors


Light Angle
15-25 OR 30-50
And Other Ral Codes

BLACK PLATED	GOLD PLATED	316 L POLISHED
ANTIC	WHITE PLATED	316 L STAINE

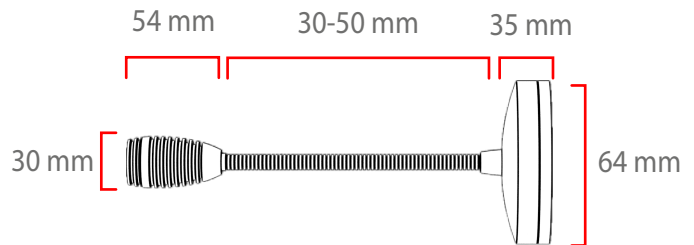


These Dimensions Can Be Changed Optionally The Driver Is Protected In An Aluminum Housing

Optional Connection



Standart Connection



Area Of Application


IP 40 Interior

IP 65 Exterior

Optional

Special Arrangements Can Be Made For Projects Including Different Sizes,Materials,Material Colors

Light Colors



Certifications

