

SLIM 3

Marine Grade Downlight



OPTIONAL

!Heat-High Voltage-Peak-Protected
Does Not Produce Frequency Interference



OPTIONAL

Special Arrangements Can Be Made For Projects
Including Different Sizes, Materials, Material Colors

OPTIONAL

Main Light And Emergency
OR
Second Color

Product Specifications


- Power Consumption.....: 18 Watt
- Standart Voltage Internal Driver.....: 24 VDC
- Optional Driverless.....:
- Light Source Led.....: Mid Power OR High Power
- Dimmable.....: PWM, Voltage, Current
- Luminous Flux.....: 2700 Lumens
- Optional**: 220 VAC OPTIONAL

Dimensions

Temp Control

Does Not
Cause fire

Voltage Limit

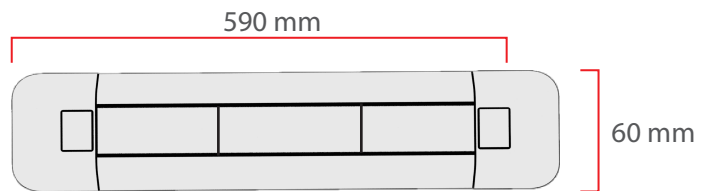


Material Colors




Acrylic
Translucent


Light Angle



Optional Connection

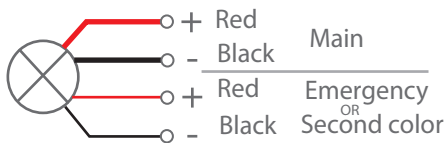

Standart Connection



Area Of Application


Interior Exterior **Engine rooms**



Slowly open the side cover


The Driver Is Protected In
An Aluminum Housing

Mounting



You can easily assemble it through the
specified holes

Light Colors



Optional



Certifications

