

# SLIM 4

Marine Grade Downlight



**OPTIONAL**

!Heat-High Voltage-Peak-Protected  
Does Not Produce Frequency Interference



**OPTIONAL**

Special Arrangements Can Be Made For Projects  
Including Different Sizes, Materials, Material Colors

**OPTIONAL**

Main Light And Emergency  
OR  
Second Color

## Product Specifications


- Power Consumption.....: 24 Watt
- Standart Voltage Internal Driver.....: 24 VDC
- Optional Driverless.....:
- Light Source Led.....: Mid Power OR High Power
- Dimmable.....: PWM, Voltage, Current
- Luminous Flux.....: 3600 Lumens
- Optional** .....: 220 VAC OPTIONAL

## Dimensions

Temp Control

Does Not Cause fire


Voltage Limit

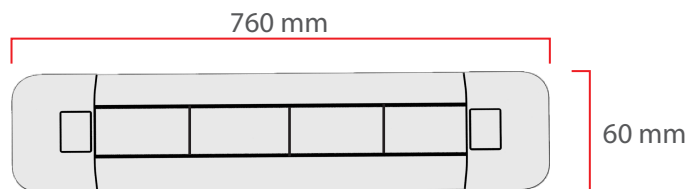


## Material Colors




## Light Angle




## Optional Connection

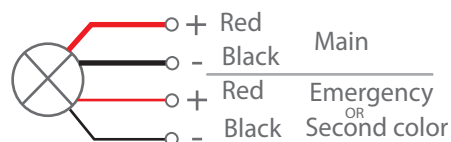

## Standart Connection



## Light Colors



## Area Of Application


Interior Exterior **Engine rooms**



Slowly open the side cover

The Driver Is Protected In  
An Aluminum Housing

## Mounting



You can easily assemble it through the  
specified holes

**Optional**



**Certifications**

