


# SLIM GLASS-2 1256 Marine Grade Downlight



**OPTIONAL**

**!Heat-High Voltage-Peak-Protected  
Does Not Produce Frequency Interference**

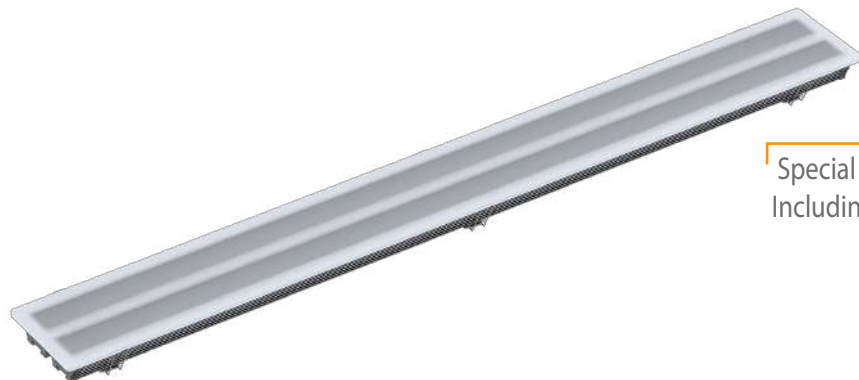

**OPTIONAL**

Special Arrangements Can Be Made For Projects Including Different Sizes, Materials, Material Colors

**OPTIONAL**

Main Light And Emergency  
OR  
Second Color

## Product Specifications

- Power Consumption.....:72 Watt
- Standart Voltage Internal Driver.....: 24 VDC
- Optional Driverless.....:
- Light Source Led.....: Mid Power OR High Power
- Dimmable.....: PWM,Voltage, Current
- Luminous Flux.....: 10.800 Lumens
- Optional** .....: 220 VAC OPTIONAL

## Dimensions


Temp Control



Does Not Cause fire



Voltage Limit




## Material Colors



Acrylic  
Translucent

Light Angle



## Area Of Application


Interior Exterior **Engine rooms**

The Driver Is Protected In An Aluminum Housing

## Optional Connection




## Standart Connection

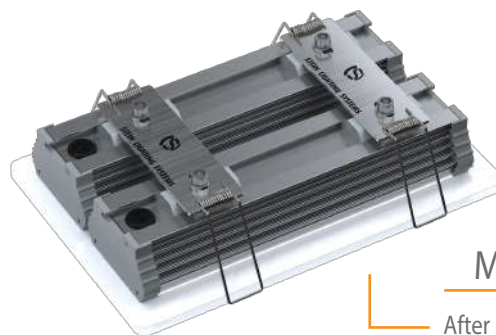

## Mounting

After stretching the springs you can easily mount them to the pierced location

## Light Colors



**Optional**



**Certifications**

