

SLIM GLASS-2 350

Marine Grade Downlight



OPTIONAL

!Heat-High Voltage-Peak-Protected
Does Not Produce Frequency Interference



OPTIONAL

Special Arrangements Can Be Made For Projects Including Different Sizes, Materials, Material Colors

OPTIONAL

Main Light And Emergency
OR
Second Color

Product Specifications



- Power Consumption.....: 24 Watt
- Standart Voltage Internal Driver.....: 24 VDC
- Optional Driverless.....:
- Light Source Led.....: Mid Power OR High Power
- Dimmable.....: PWM, Voltage, Current
- Luminous Flux.....: 3600 Lumens
- Optional: 220 VAC OPTIONAL

Dimensions

Temp Control

Does Not Cause fire

Voltage Limit

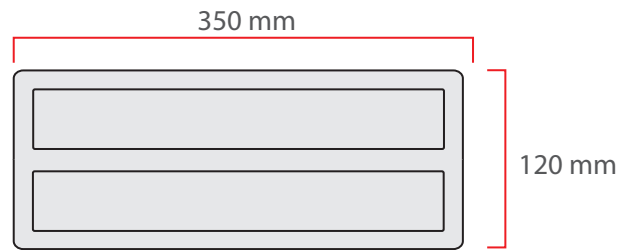


Material Colors



Acrylic
Translucent


Light Angle





Area Of Application

Interior Exterior **Engine rooms**

Optional Connection

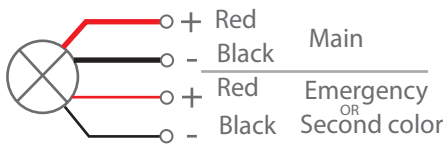

Standart Connection

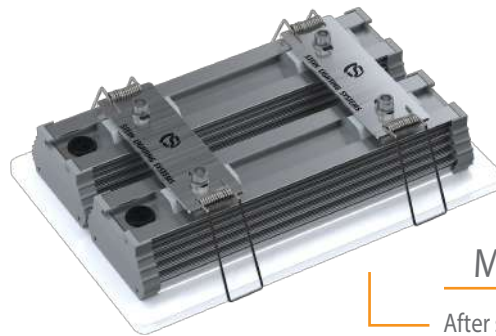


The Driver Is Protected In An Aluminum Housing

Mounting

After stretching the springs you can easily mount them to the pierced location

Light Colors



Optional



Certifications

