

SLIM GLASS-2 655

Marine Grade Downlight



OPTIONAL

!Heat-High Voltage-Peak-Protected
Does Not Produce Frequency Interference



OPTIONAL

Special Arrangements Can Be Made For Projects
Including Different Sizes, Materials, Material Colors

OPTIONAL

Main Light And Emergency
OR
Second Color

Product Specifications


- Power Consumption.....: 36 Watt
- Standart Voltage Internal Driver.....: 24 VDC
- Optional Driverless.....:
- Light Source Led.....: Mid Power OR High Power
- Dimmable.....: PWM, Voltage, Current
- Luminous Flux.....: 5400 Lumens
- Optional**: 220 VAC OPTIONAL

Dimensions


Temp Control

Does Not
Cause fire

Voltage Limit



655 mm

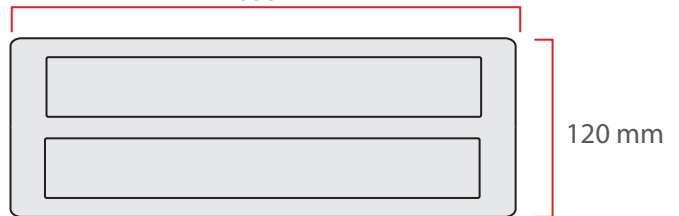


Material Colors



Acrylic
Translucent

Light Angle




Area Of Application



Interior Exterior **Engine rooms**

The Driver Is Protected In
An Aluminum Housing

Optional Connection

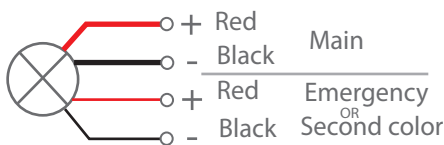


Standart Connection

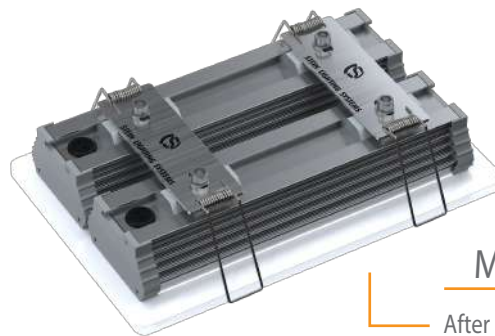

Mounting

After stretching the springs you can easily
mount them to the pierced location

Light Colors



Optional



Certifications

