

SLIM GLASS 200

Marine Grade Downlight



OPTIONAL

!Heat-High Voltage-Peak-Protected
Does Not Produce Frequency Interference



OPTIONAL

Special Arrangements Can Be Made For Projects
Including Different Sizes, Materials, Material Colors

OPTIONAL

Main Light And Emergency
OR
Second Color

Product Specifications



- Power Consumption.....: 6 Watt
- Standart Voltage Internal Driver.....: 24 VDC
- Optional Driverless.....:
- Light Source Led.....: Mid Power OR High Power
- Dimmable.....: PWM, Voltage, Current
- Luminous Flux.....: 900 Lumens
- Optional**: 220 VAC OPTIONAL

Dimensions

Temp Control

Does Not Cause fire

Voltage Limit

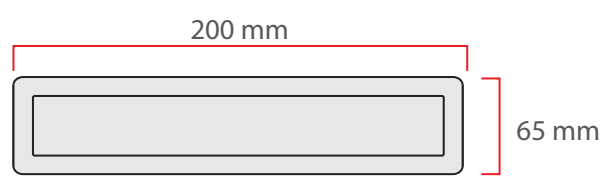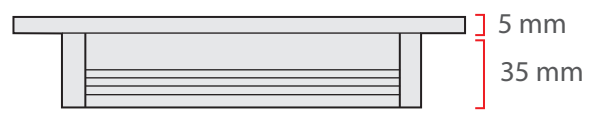


Material Colors



Acrylic
Translucent

Light Angle



Area Of Application


- Interior
- Exterior
- Engine rooms**

The Driver Is Protected In
An Aluminum Housing

Optional Connection




Standart Connection



Mounting

After stretching the springs you can easily
mount them to the pierced location

Light Colors

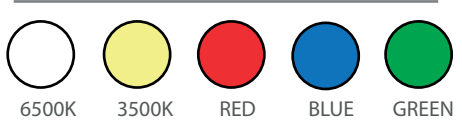

Optional



Certifications

