

SLIM GLASS 350

Marine Grade Downlight



OPTIONAL

!Heat-High Voltage-Peak-Protected
Does Not Produce Frequency Interference



OPTIONAL

Special Arrangements Can Be Made For Projects
Including Different Sizes, Materials, Material Colors

OPTIONAL


Main Light And Emergency
OR
Second Color

Product Specifications


- Power Consumption.....: 12 Watt
- Standart Voltage Internal Driver.....: 24 VDC
- Optional Driverless.....:
- Light Source Led.....: Mid Power OR High Power
- Dimmable.....: PWM, Voltage, Current
- Luminous Flux.....: 1800 Lumens
- Optional**: 220 VAC OPTIONAL

Temp Control Does Not Cause fire Voltage Limit


Dimensions

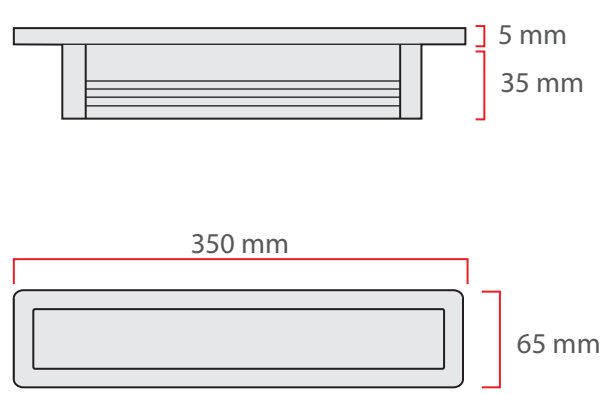


Material Colors



Optional Connection

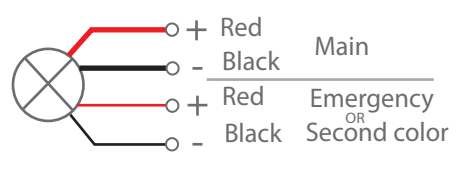

Standart Connection



Area Of Application
Interior Exterior **Engine rooms**


↑
The Driver Is Protected In
An Aluminum Housing



Mounting

After stretching the springs you can easily
mount them to the pierced location

Light Colors

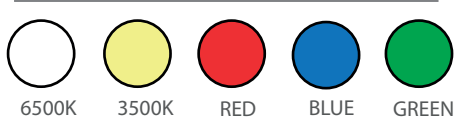

Optional



Certifications

