

# SLIM GLASS 655

Marine Grade Downlight



**OPTIONAL**

!Heat-High Voltage-Peak-Protected  
Does Not Produce Frequency Interference



**OPTIONAL**

Special Arrangements Can Be Made For Projects  
Including Different Sizes, Materials, Material Colors

**OPTIONAL**

Main Light And Emergency  
OR  
Second Color

## Product Specifications



- Power Consumption.....: 18 Watt
- Standart Voltage Internal Driver.....: 24 VDC
- Optional Driverless.....:
- Light Source Led.....: Mid Power OR High Power
- Dimmable.....: PWM, Voltage, Current
- Luminous Flux.....: 2700 Lumens
- Optional** .....: 220 VAC OPTIONAL

## Dimensions

Temp Control

Does Not Cause fire

Voltage Limit

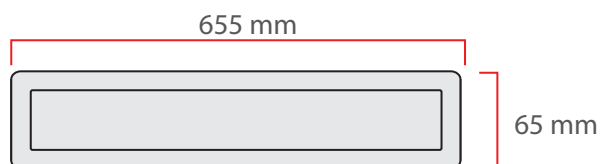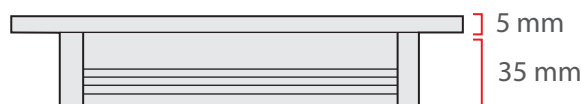


## Material Colors



Acrylic  
Translucent

## Light Angle




## Area Of Application


Interior Exterior **Engine rooms**

The Driver Is Protected In  
An Aluminum Housing

## Optional Connection

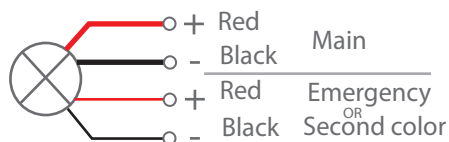


## Standart Connection

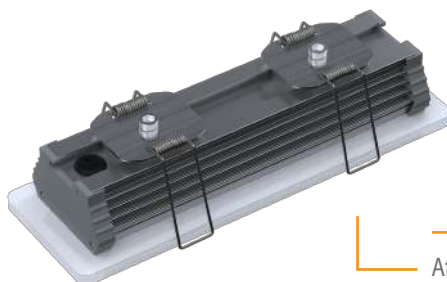

## Mounting

After stretching the springs you can easily  
mount them to the pierced location

## Light Colors



**Optional**



**Certifications**

