

# STEIN EX Z1 400

Industry Grade Lighting



**OPTIONAL**

!Heat-High Voltage-Peak-Protected  
Does Not Produce Frequency Interference



**OPTIONAL**

Special Arrangements Can Be Made For Projects Including Different Sizes, Materials, Material Colors

**OPTIONAL**

Main Light And Emergency  
OR  
Second Color

## Product Specifications


- Power Consumption.....: 66 Watt
- Standart Voltage Internal Driver.....: 24 VDC Protected 30 VDC
- Optional Driverless.....:
- Light Source Led.....:
- Dimmable.....: PWM, Voltage, Current
- Luminous Flux.....: 9.900 Lumens
- Optional** .....: 220 VAC OPTIONAL

## Dimensions

Temp Control

Does Not Cause fire

Voltage Limit

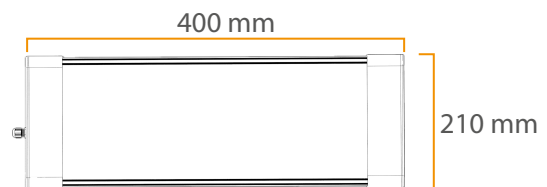

## Material Colors




ALUMINUM BODY



PBT SIDE COVER

## Light Angle



**Ex** EXPROOF ZONE 1

## Area Of Application


Interior Exterior **Engine rooms**

The Driver Is Protected In An Aluminum Housing


## Optional Connection



## Standart Connection




## Mounting

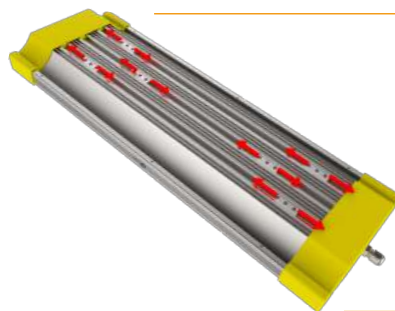

You can align and mount the moving assembly parts to the holes in the mounting location.

## Light Colors



## Certifications

