

SVRXP 110-38



**!Heat-High Voltage-Peak-Protected
Does Not Produce Frequency Interference**

Marine Grade Downlight



Optional

Special Arrangements Can Be Made For Projects Including Different Sizes, Materials, Material Colors



Optional

Main Light And Emergency OR Second Color


Product Specifications

- Power Consumption.....: 24 Watt
- Standart Voltage Internal Driver.....: 24 VDC Protected 60 VDC
- Optional Driverless.....: Current 3 OR 18 V 300 -1.500 ma
- Light Source Led.....: High Power
- Dimmable.....: PWM, Voltage, Current
- Luminous Flux.....: RGB

- Temp Control
- Does Not Cause fire
- Voltage Limit
- Does Not Cause Frequency



Dimensions

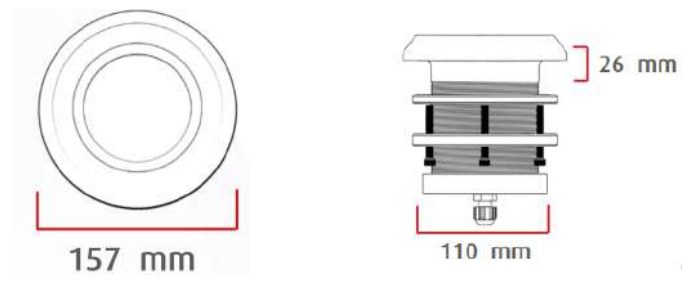


Material Colors



316 STAINLESS STEEL

Light Angle




And Other Ral Codes


These Dimensions Can Be Changed Optionally

The Driver Is Protected In An Aluminum Housing

Optional Connection



Standart Connection




Area Of Application

IP 40 Interior

IP 65 Exterior



Light Colors

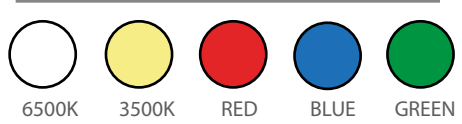

Certifications

