

**!Heat-High Voltage-Peak-Protected  
Does Not Produce Frequency Interference**

Marine Grade Downlight



### Optional

Special Arrangements Can Be Made For Projects Including Different Sizes, Materials, Material Colors



### Optional

Main Light And Emergency  
OR  
Second Color

### Product Specifications

- Power Consumption.....: 6 Watt
- Standart Voltage Internal Driver.....: 24 VDC Protected 60 VDC
- Optional Driverless.....:
- Light Source Led.....: Mid Power OR High Power
- Dimmable.....: PWM, Voltage, Current
- Luminous Flux.....: 840 Lumens



Temp Control

Does Not Cause fire

Voltage Limit



### Dimensions

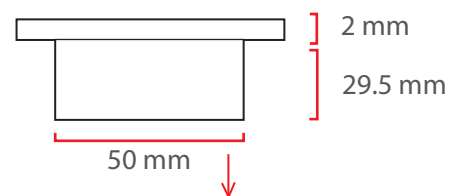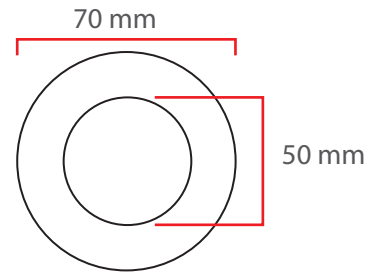


### Material Colors



And Other Ral Codes


### Light Angle



50-52 mm

The Driver Is Protected In An Aluminum Housing

### Optional Connection




### Standart Connection



### Area Of Application

IP 40 Interior Optional IP65

### Light Colors



### Certifications

