

Mila 40S-V2 New High Tech Series

! Heat - High Voltage - Peak- Protected
Does Not Produce Frequency Interference

Marine grade downlight



Optional

Special Arrangements Can Be Made For Projects
 Including Different Sizes, Materials, Material Colors



Optional

Main Light And Emergency
 OR
 Second Color

Product Specifications

Power Consumption	: 3.6, 5, 7, 9 Watt
Standart Voltage Internal Driver	: 24 VDC Protected 60 VDC
Optional Driverless	: Current 3 OR 18 V 300 - 1.500 ma
Light Source Led	: Mid Power OR High Power
Dimmable	: PWM, Voltage, Current
Luminous Flux	: 500 - 1.000 - 1.350 Lumens

Material Colors




Light Angle



And Other Ral Codes

Dimensions



These Dimensions Can Be
 Changed Optionally

Temp Control



Does Not
 Cause fire




Voltage Limit



Does Not Cause
 Frequency



49 mm

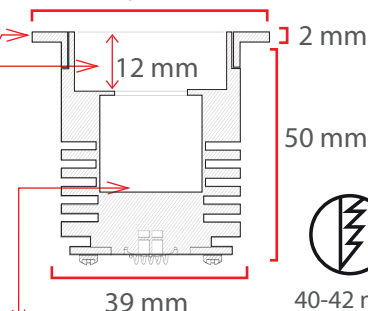


The Driver Is Protected In
 An Aluminum Housing

Optional Connection



Standart Connection



Interior



Area Of Application


IP 40 Interior

IP 65 Exterior

Exterior



Light Colors



Certifications

