

# Mila 60S-V2 New High Tech Series

**! Heat - High Voltage - Peak- Protected  
Does Not Produce Frequency Interference**

Marine grade downlight



## Optional

Special Arrangements Can Be Made For Projects Including Different Sizes, Materials, Material Colors



## Optional



Main Light And Emergency OR Second Color

## Product Specifications

- Power Consumption : 5,6,9,12, Watt
- Standart Voltage Internal Driver : 24 VDC Protected 60 VDC
- Optional Driverless : Current 18 V 300 -1.500 ma
- Light Source Led : Mid Power OR High Power
- Dimmable : PWM, Voltage, Current
- Luminous Flux : 1.000 -1.350-1.800 Lumens

Temp Control Does Not Cause fire Voltage Limit Does Not Cause Frequency

## Dimensions

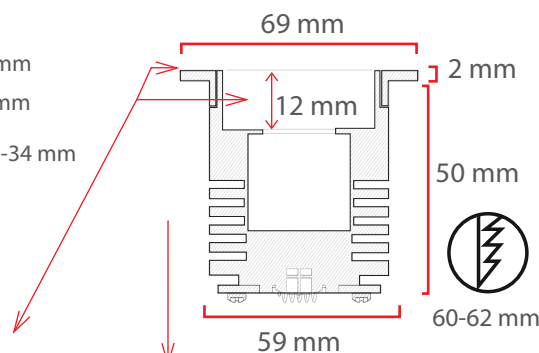

## Material Colors

## Light Angle





And Other Ral Codes

These Dimensions Can Be Changed Optionally

The Driver Is Protected In An Aluminum Housing

## Optional Connection

## Standart Connection





## Area Of Application

IP 40 Interior


IP 65 Exterior

## Interior

## Exterior



## Light Colors



## Certifications

