


Mila 80S-V2 New High Tech Series

**! Heat - High Voltage - Peak- Protected
Does Not Produce Frequency Interference**

Marine grade downlight



STEIN
MARINE LIVING



Optional

Special Arrangements Can Be Made For Projects Including Different Sizes, Materials, Material Colors



Optional



Main Light And Emergency OR Second Color

Product Specifications

- Power Consumption : 6, 9, 12, 14 Watt
- Standart Voltage Internal Driver : 24 VDC Protected 60 VDC
- Optional Driverless : Current 18 V 300-1.500 ma
- Light Source Led : Mid Power OR High Power
- Dimmable : PWM, Voltage, Current
- Luminous Flux : 1.000 -1.350-1.800-2.100 Lumens


Temp Control Does Not Cause fire Voltage Limit Does Not Cause Frequency

Dimensions

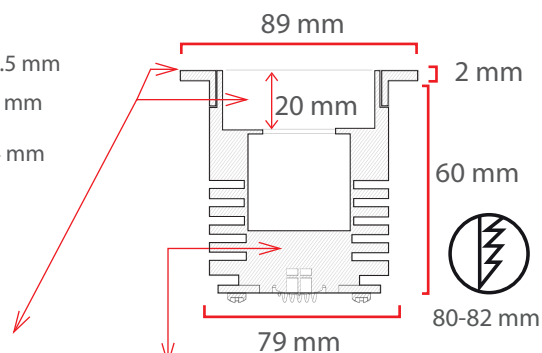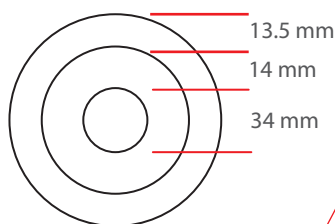

Material Colors

Light Angle




And Other Ral Codes

These Dimensions Can Be Changed Optionally

The Driver Is Protected In An Aluminum Housing

Optional Connection

Standart Connection




Area Of Application

IP 40 Interior

IP 65 Exterior

Interior

Exterior

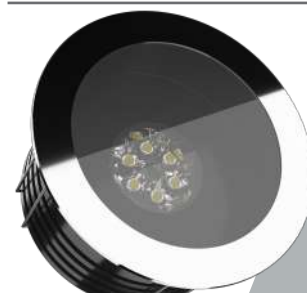

Light Colors

Certifications

