


Nelly X3-R3 New High Tech Series



STEIN
MARINE LIVING

**!Heat-High Voltage-Peak-Protected
Does Not Produce Frequency Interference**

Marine Grade Downlight



Optional
Main Light And Emergency
OR
Second Color

Product Specifications

- Power Consumption.....: 3 x 4 Watt = 12 Watt
- Standart Voltage Internal Driver.....: 24 VDC Protected 60 VDC
- Optional Driverless.....: Current 3 OR 18 V 300 - 1.500 ma
- Light Source Led.....: Mid Power OR High Power
- Dimmable.....: PWM, Voltage, Current
- Luminous Flux.....: 500 - 1.000 - 1.350 Lumens



Dimensions

Temp Control  Does Not Cause fire  Voltage Limit 

Material Colors




And Other Ral Codes

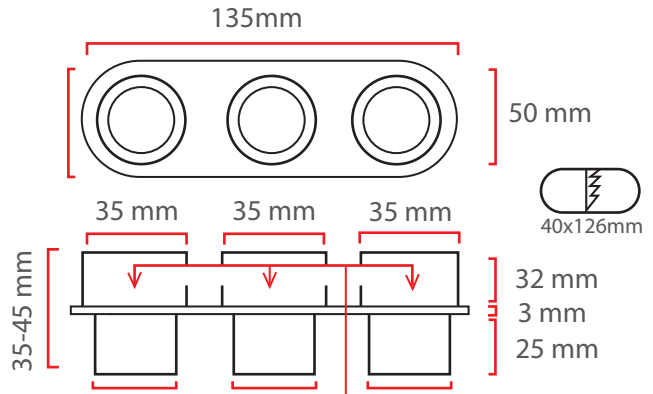


The Driver Is Protected In An Aluminum Housing Area Of Application

IP 40 Interior Optional IP65


Optional Connection




Standart Connection



The symbolic colors below can be combined in different color combinations

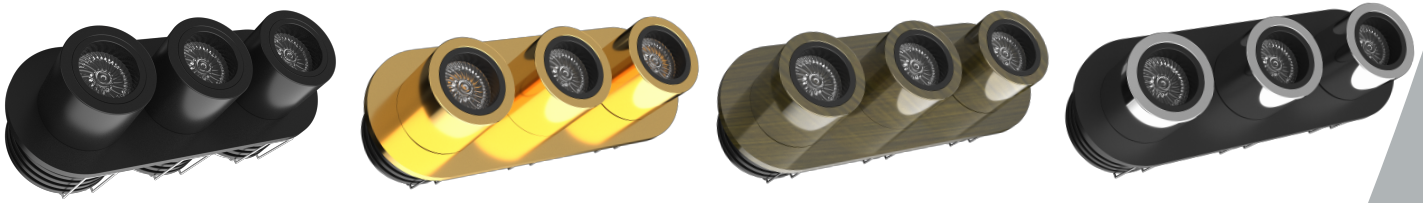

Light Colors

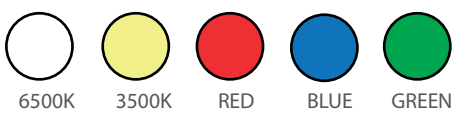

Certifications

