

# READ OB -K2



**!Heat-High Voltage-Peak-Protected  
Does Not Produce Frequency Interference**

Marine Grade Downlight



Optional  
Main Light And Emergency  
OR  
Second Color

## Product Specifications

- Power Consumption.....: 3 Watt
- Standart Voltage Internal Driver.....: 24 VDC Protected 60 VDC
- Optional Driverless.....: Current 3 OR 18 V 300 -1.500 ma
- Light Source Led.....: Mid Power OR High Power
- Dimmable.....: PWM,Voltage, Current
- Luminous Flux.....: 300 Lumens

Temp Control    Does Not Cause fire    Voltage Limit    Does Not Cause Frequency


## Material Colors



Light Angle



And Other Ral Codes

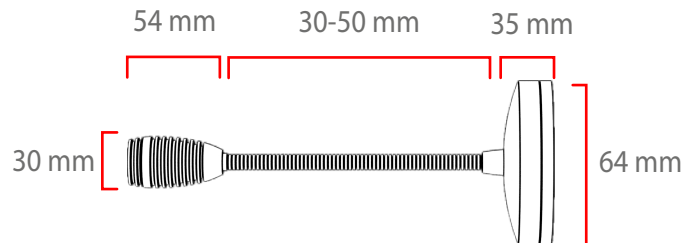


These Dimensions Can Be Changed Optionally

The Driver Is Protected In An Aluminum Housing

## Optional Connection




## Standart Connection



## Optional

Special Arrangements Can Be Made For Projects Including Different Sizes,Materials,Material Colors

## Light Colors



## Certifications

