


# Nelly X2-4

**!Heat-High Voltage-Peak-Protected  
Does Not Produce Frequency Interference**

Marine Grade Downlight



**STEIN**  
MARINE LIVING

## Optional

Special Arrangements Can Be Made For Projects Including Different Sizes, Materials, Material Colors

## Optional


Main Light And Emergency  
OR  
Second Color

## Product Specifications

- Power Consumption.....: 5,7,9,12Watt
- Standart Voltage Internal Driver.....: 24 VDC Protected 60 VDC
- Optional Driverless.....: Current 3 OR 18 V 300 -1.500 ma
- Light Source Led.....: Mid Power OR High Power
- Dimmable.....: PWM, Voltage, Current
- Luminous Flux.....: 500 - 1.000 - 1.350 Lumens

Temp Control    Does Not Cause fire    Voltage Limit    Does Not Cause Frequency

## Dimensions

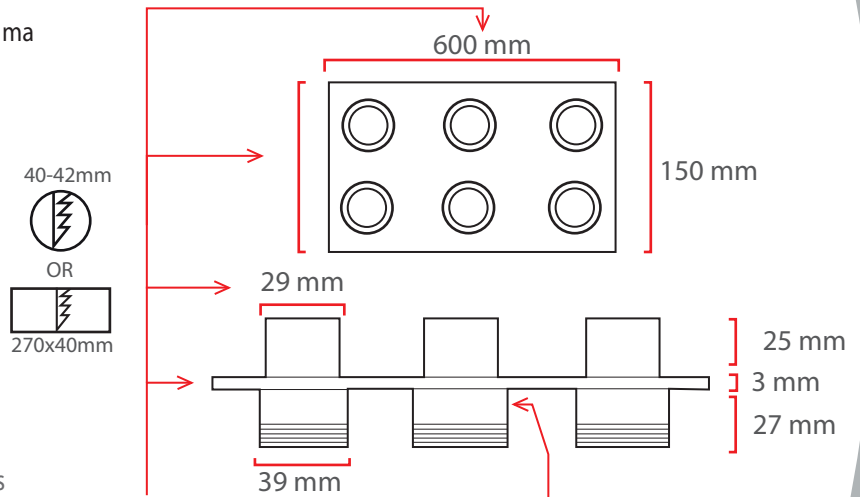


These Dimensions Can Be Changed Optionally

The Driver Is Protected In An Aluminum Housing

## Material Colors



## Light Angle




And Other Ral Codes

## Optional Connection



## Standart Connection




The symbolic colors below can be combined in different color combinations


## Area Of Application

IP 40 Interior

IP 65 Exterior

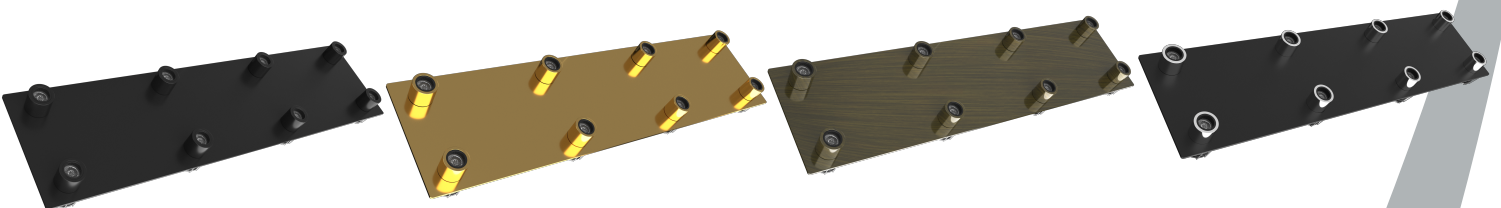

## Light Colors



## Certifications

