



Nelly X3-R3 New High Tech Series

!Heat-High Voltage-Peak-Protected
Does Not Produce Frequency Interference

Marine Grade Downlight



STEIN
MARINE LIVING

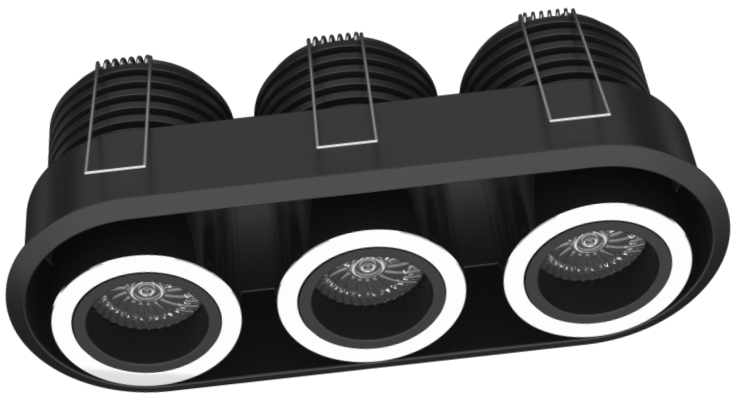


Optional
Main Light And Emergency
OR
Second Color

Product Specifications

- Power Consumption.....: 3 x 4 Watt = 12 Watt
- Standart Voltage Internal Driver.....: 24 VDC Protected 60 VDC
- Optional Driverless.....: Current 3 OR 18 V 300 -1.500 ma
- Light Source Led.....: Mid Power OR High Power
- Dimmable.....: PWM,Voltage, Current
- Luminous Flux.....: 500 - 1.000 - 1.350 Lumens

Temp Control Does Not Cause fire Voltage Limit Does Not Cause Frequency

Dimensions

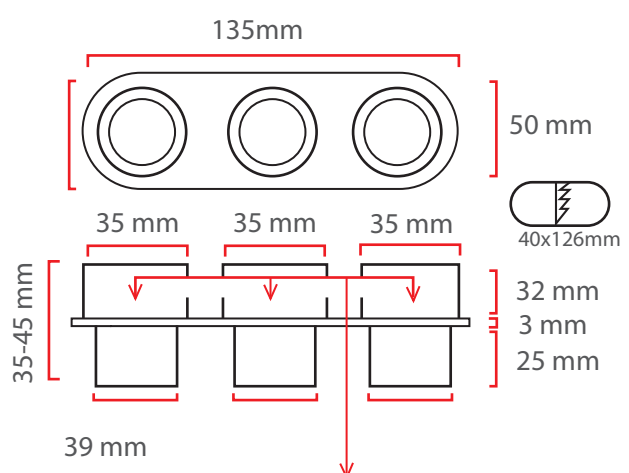

The Driver Is Protected In
An Aluminum Housing
Area Of Application

IP 40 Interior Optional IP65

Material Colors




And Other Ral Codes


Light Angle




Optional Connection




Standart Connection



The symbolic colors below can be combined in different color combinations

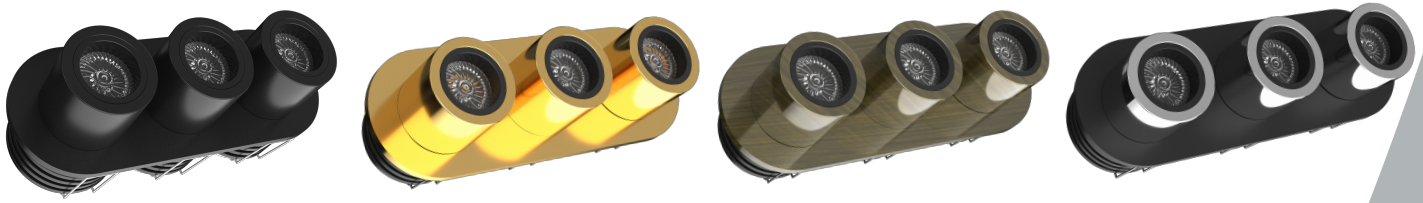

Light Colors



Certifications

