

ZOE V2-2



**!Heat-High Voltage-Peak-Protected
Does Not Produce Frequency Interference**

Marine Grade Downlight



Optional

Special Arrangements Can Be Made For Projects Including Different Sizes, Materials, Material Colors

Optional


Main Light And Emergency OR Second Color

Product Specifications

- Power Consumption.....: 0.25 Watt
- Standart Voltage Internal Driver.....: 24 VDC Protected 60 VDC
- Optional Driverless.....: Current 3 OR 18 V 300 -1.500 ma
- Light Source Led.....: Mid Power OR High Power
- Dimmable.....: PWM, Voltage, Current
- Luminous Flux.....: 40 Lumens

Temp Control  Does Not Cause fire  Voltage Limit 

Dimensions

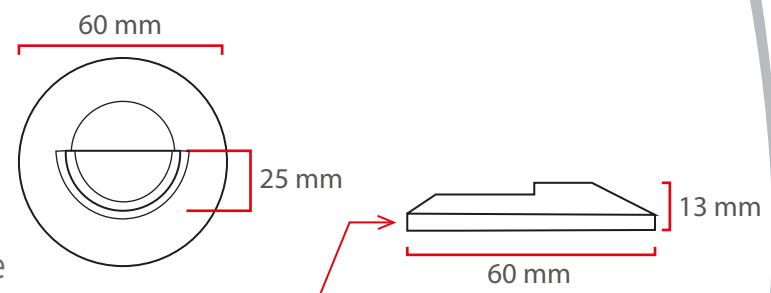

Material Colors




Light Angle




And Other Ral Codes

The Driver Is Protected In An Aluminum Housing

Optional Connection




Standart Connection




Area Of Application

IP 40 Interior Optional IP65

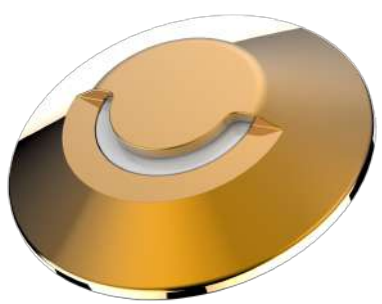

Light Colors



Certifications

