



OPTIONAL

**!Heat-High Voltage-Peak-Protected
Does Not Produce Frequency Interference**



OPTIONAL

Special Arrangements Can Be Made For Projects Including Different Sizes, Materials, Material Colors

OPTIONAL

Main Light And Emergency
OR
Second Color

Product Specifications

- Power Consumption.....: 148 Watt
- Standart Voltage Internal Driver.....: 24 VDC Protected 30 VDC
- Optional Driverless.....:
- Light Source Led.....:
- Dimmable.....: PWM, Voltage, Current
- Luminous Flux.....: 16.000 Lumens
- Optional**.....: 220 VAC OPTIONAL


Temp Control

Does Not Cause fire

Voltage Limit



Dimensions

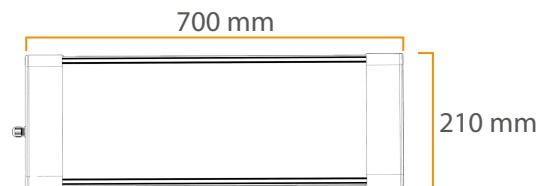

Material Colors




ALUMINUM BODY



PBT SIDE COVER

Light Angle



Area Of Application


Interior Exterior **Engine rooms**

The Driver Is Protected In An Aluminum Housing

Optional Connection




Standart Connection



Mounting

You can align and mount the moving assembly parts to the holes in the mounting location.

Light Colors



Optional



Certifications

