

# SVRXP 110-12 INNER CAPSULE



**!Heat-High Voltage-Peak-Protected  
Does Not Produce Frequency Interference**

Marine Grade Downlight



## Optional

Special Arrangements Can Be Made For Projects Including Different Sizes, Materials, Material Colors

## Optional



Main Light And Emergency OR Second Color

## Product Specifications

- Power Consumption.....: 24 Watt
- Standart Voltage Internal Driver.....: 24 VDC Protected 60 VDC
- Optional Driverless.....: Current 3 OR 18 V 300 -1.500 ma
- Light Source Led.....: High Power
- Dimmable.....: PWM, Voltage, Current
- Luminous Flux.....: RGB

Temp Control	Does Not Cause fire	Voltage Limit	Does Not Cause Frequency

## Dimensions




## Material Colors



316 STAINLESS STEEL

## Light Angle




And Other Ral Codes


These Dimensions Can Be Changed Optionally

The Driver Is Protected In An Aluminum Housing

## Optional Connection



## Standart Connection




## Area Of Application

IP 40 Interior

IP 65 Exterior



## Light Colors

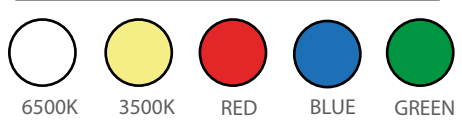

## Certifications

