

# G4-20


**!Heat-High Voltage-Peak-Protected  
Does Not Produce Frequency Interference**

Marine Grade Downlight



## Optional

Special Arrangements Can Be Made For Projects Including Different Sizes, Materials, Material Colors

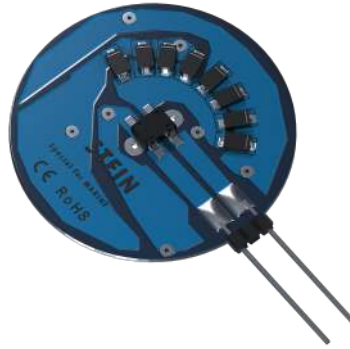

## Optional

Main Light And Emergency  
OR  
Second Color

## Product Specifications

- Power Consumption.....: 1 Watt
- Standart Voltage Internal Driver.....: 24 VDC Protected 60 VDC
- Optional Driverless.....: Current 3 OR 18 V 300 -1.500 ma
- Light Source Led.....: Mid Power OR High Power
- Socket Type.....: G4
- Dimmable.....: PWM, Voltage, Current
- Luminous Flux.....: 150 Lumens

Temp Control



Does Not Cause fire




Voltage Limit




## Dimensions

30 mm



## Light Angle




The Driver Is Protected In An Aluminum Housing


## Area Of Application

IP 40 Interior Optional IP65

## Optional Connection



## Standart Connection




Side Socket



Bottom Socket



## Light Colors



## Certifications

