

Nelly V2-28-34-50



**!Heat-High Voltage-Peak-Protected
Does Not Produce Frequency Interference**

Marine Grade Downlight



Optional

Special Arrangements Can Be Made For Projects Including Different Sizes, Materials, Material Colors




Optional

Main Light And Emergency OR Second Color


Product Specifications

- Power Consumption.....: 5,7,9,12Watt
- Standart Voltage Internal Driver.....: 24 VDC Protected 60 VDC
- Optional Driverless.....: Current 3 OR 18 V 300 -1.500 ma
- Light Source Led.....: Mid Power OR High Power
- Dimmable.....: PWM, Voltage, Current
- Luminous Flux.....: 500 - 1.000 - 1.350 Lumens

Dimensions




- Temp Control
- Does Not Cause fire
- Voltage Limit
- Does Not Cause Frequency



Material Colors



Light Angle




And Other Ral Codes


These Dimensions Can Be Changed Optionally

The Driver Is Protected In An Aluminum Housing


Optional Connection




Standart Connection



This product is designed to fit into any space with these dimensions and you can easily mount it by drilling as many holes as you like

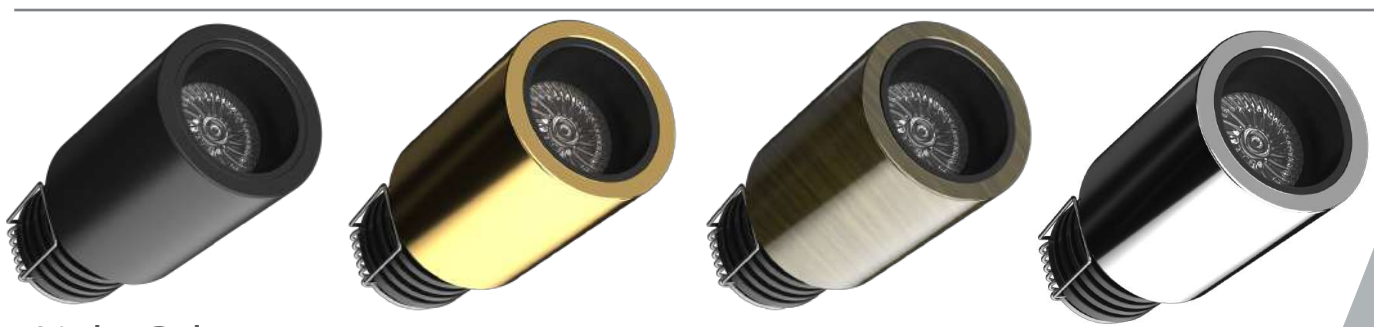

Light Colors

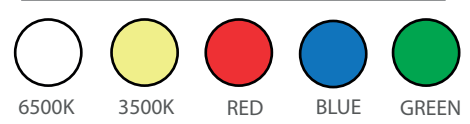

Certifications

