

# NELLY X4-H25




**!Heat-High Voltage-Peak-Protected  
Does Not Produce Frequency Interference**

Marine Grade Downlight

## Optional

Special Arrangements Can Be Made For Projects Including Different Sizes, Materials, Material Colors

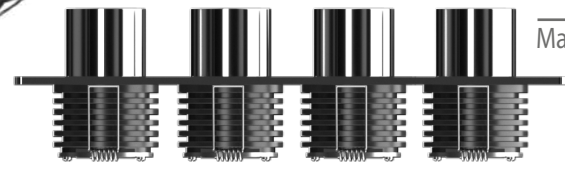

## Optional


Main Light And Emergency OR Second Color

## Product Specifications



- Power Consumption.....: 3 x 4 Watt = 12 Watt (PER LAMP)
- Standart Voltage Internal Driver.....: 24 VDC Protected 60 VDC
- Optional Driverless.....: Current 3 OR 18 V 300 -1.500 ma
- Light Source Led.....: Mid Power OR High Power
- Dimmable.....: PWM, Voltage, Current
- Luminous Flux.....: 500 - 1.000 - 1.350 Lumens

Temp Control Does Not Cause fire Voltage Limit

## Dimensions

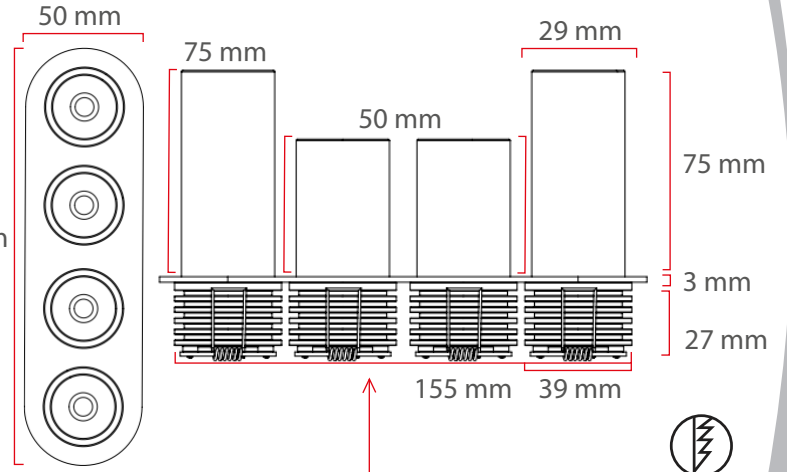

## Material Colors

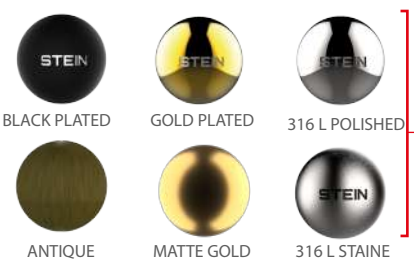


And Other Ral Codes


The length of the frame part of the product can vary between 25mm, 50mm, or 75mm as desired

The Driver Is Protected In An Aluminum Housing

## Optional Connection



## Standart Connection




## Area Of Application

IP 40 Interior Optional IP65



## Light Colors

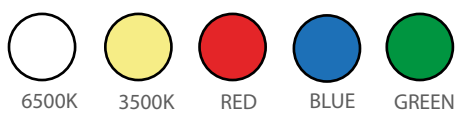

## Certifications

