

Nelly V2 50-10



**!Heat-High Voltage-Peak-Protected
Does Not Produce Frequency Interference**

Marine Grade Downlight

Optional

Special Arrangements Can Be Made For Projects Including Different Sizes, Materials, Material Colors



Optional


Main Light And Emergency OR Second Color

Product Specifications

- Power Consumption.....: 5,7,9 Watt
- Standart Voltage Internal Driver.....: 24 VDC Protected 60 VDC
- Optional Driverless.....: Current 3 OR 18 V 300 -1.500 ma
- Light Source Led.....: Mid Power OR High Power
- Dimmable.....: PWM, Voltage, Current
- Luminous Flux.....: 500 - 1.000 - 1.350 Lumens

Temp Control	Does Not Cause fire	Voltage Limit	Does Not Cause Frequency

Dimensions

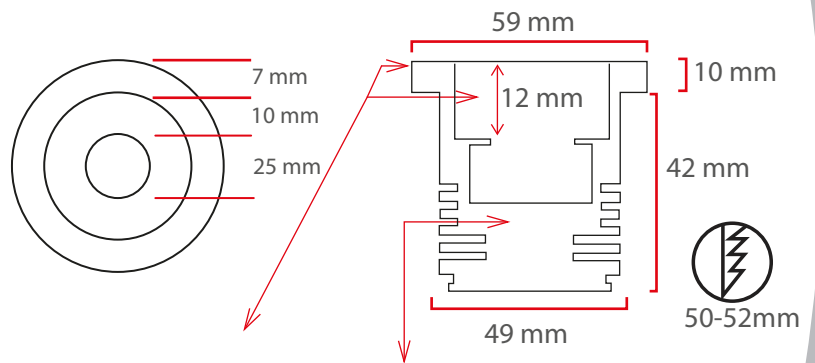


These Dimensions Can Be Changed Optionally

The Driver Is Protected In An Aluminum Housing


Material Colors

			<p>Light Angle</p> <p>And Other Ral Codes</p>
BLACK PLATED	GOLD PLATED	316 L POLISHED	
ANTIQUUE	WHITE PLATED	316 L STAINE	

Optional Connection






Standart Connection



Area Of Application

IP 40 Interior

IP 65 Exterior

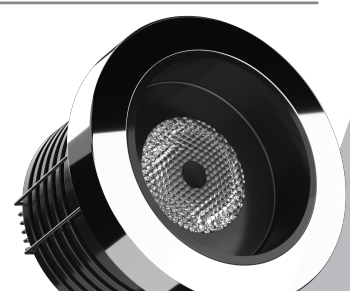

Light Colors

6500K	3500K	RED	BLUE	GREEN

Certifications

			IP40 OR IP65		
--	--	--	--------------	--	--