

# Nelly V2 70-10




**!Heat-High Voltage-Peak-Protected  
Does Not Produce Frequency Interference**

Marine Grade Downlight

Optional

Special Arrangements Can Be Made For Projects Including Different Sizes, Materials, Material Colors

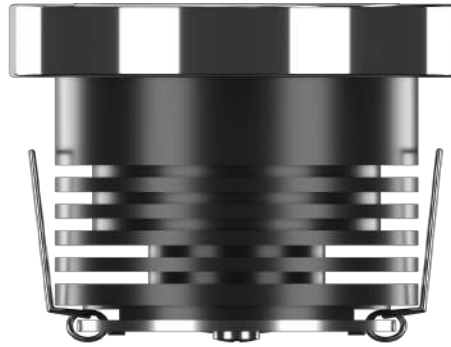

Optional


Main Light And Emergency OR Second Color

## Product Specifications

- Power Consumption.....: 5,7,9 Watt
- Standart Voltage Internal Driver.....: 24 VDC Protected 60 VDC
- Optional Driverless.....: Current 3 OR 18 V 300 -1.500 ma
- Light Source Led.....: Mid Power OR High Power
- Dimmable.....: PWM, Voltage, Current
- Luminous Flux.....: 500 - 1.000 - 1.350 Lumens

Temp Control	Does Not Cause fire	Voltage Limit	Does Not Cause Frequency

## Dimensions

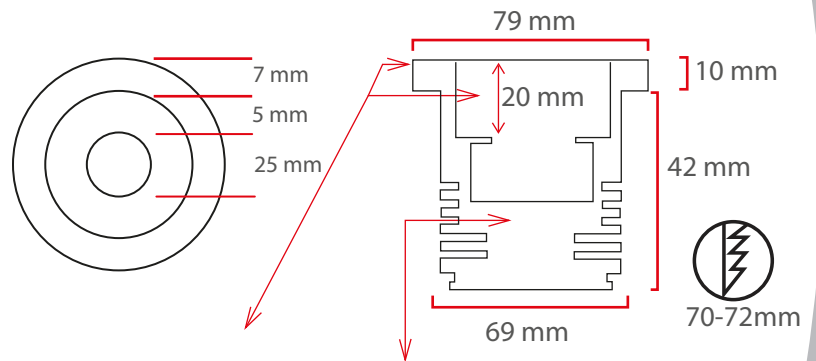


These Dimensions Can Be Changed Optionally

The Driver Is Protected In An Aluminum Housing


## Material Colors

			<p>Light Angle</p> <p>And Other Ral Codes</p>
BLACK PLATED	GOLD PLATED	316 L POLISHED	
ANTIQUÉ	WHITE PLATED	316 L STAINÉ	

## Optional Connection



## Standart Connection



## Area Of Application

IP 40 Interior

IP 65 Exterior

## Light Colors

6500K	3500K	RED	BLUE	GREEN

## Certifications

			IP40 OR IP65		
--	--	--	--------------	--	--