

# Nelly V2 90-20




**!Heat-High Voltage-Peak-Protected  
Does Not Produce Frequency Interference**

Marine Grade Downlight



## Optional

Special Arrangements Can Be Made For Projects Including Different Sizes, Materials, Material Colors

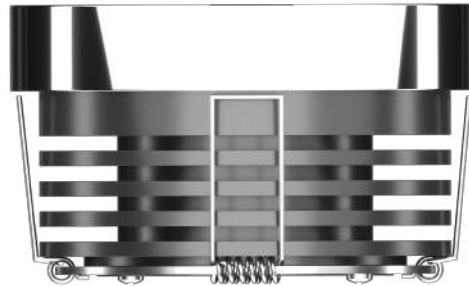

## Optional

Main Light And Emergency OR Second Color

## Product Specifications

- Power Consumption.....: 5,7,9 Watt
- Standart Voltage Internal Driver.....: 24 VDC Protected 60 VDC
- Optional Driverless.....: Current 3 OR 18 V 300 -1.500 ma
- Light Source Led.....: Mid Power OR High Power
- Dimmable.....: PWM, Voltage, Current
- Luminous Flux.....: 500 - 1.000 - 1.350 Lumens

Temp Control



Does Not Cause fire




Voltage Limit



Does Not Cause Frequency



## Dimensions

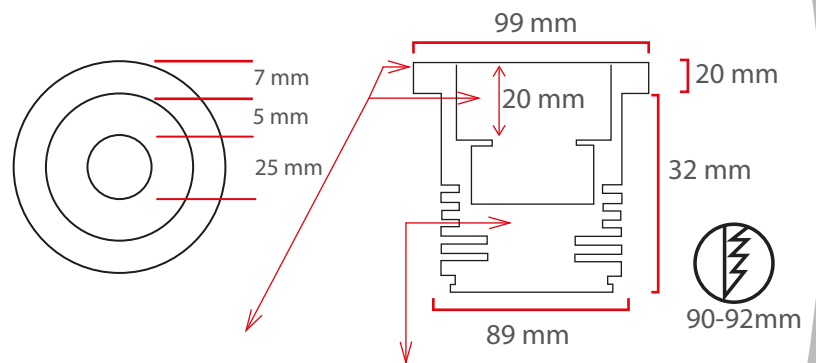

These Dimensions Can Be Changed Optionally

The Driver Is Protected In An Aluminum Housing

## Material Colors



## Light Angle




And Other Ral Codes

## Area Of Application



IP 40 Interior

IP 65 Exterior


## Optional Connection



## Standart Connection

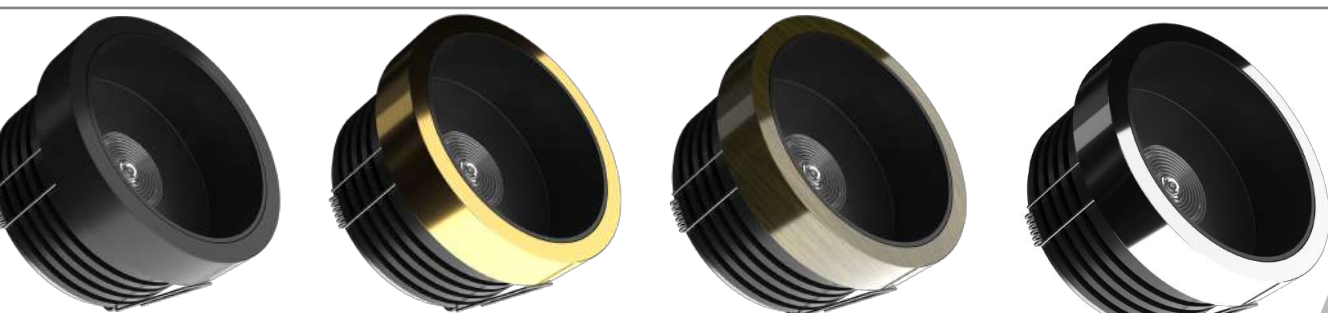

## Light Colors



## Certifications

