

LINE 2




**!Heat-High Voltage-Peak-Protected
Does Not Produce Frequency Interference**

Marine Grade Downlight

Optional

Special Arrangements Can Be Made For Projects Including Different Sizes, Materials, Material Colors

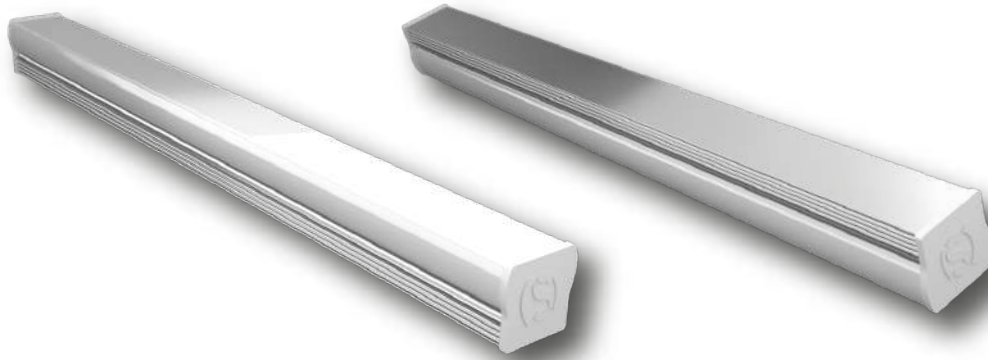


Optional

Main Light And Emergency
OR
Second Color


Product Specifications

- Power Consumption.....: 13,4 Watt (PER METER)
- Standart Voltage Internal Driver.....: 24 VDC
- Optional Driverless.....: Current 3 OR 18 V 300 -1.500 ma
- Light Source Led.....: Mid Power OR High Power
- Dimmable.....: PWM, Voltage, Current
- Luminous Flux.....: 1560 Lumens


Dimensions

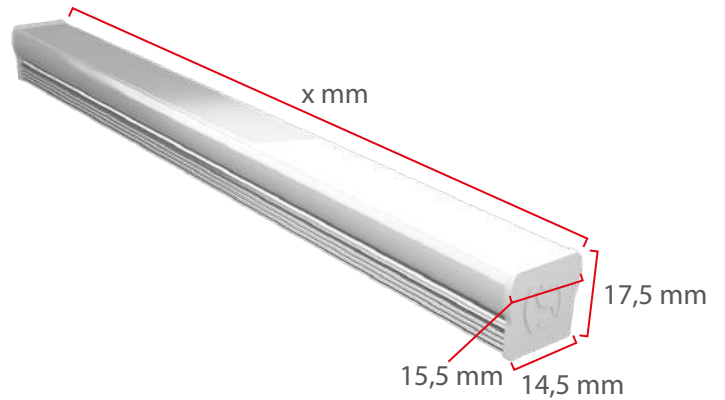

Material Colors

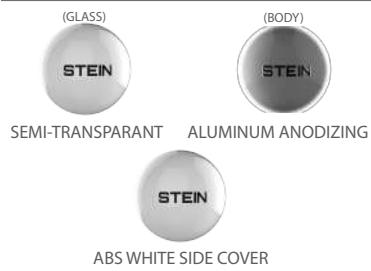


Light Angle




And Other Ral Codes

Optional Connection




Standart Connection



Area Of Application

IP 40 Interior

Light Colors



Certifications

