


Aria 410 V2

!Heat-High Voltage-Peak-Protected
Does Not Produce Frequency Interference


Marine Grade Downlight



STEIN
MARINE LIVING

Optional

Special Arrangements Can Be Made For Projects Including Different Sizes, Materials, Material Colors

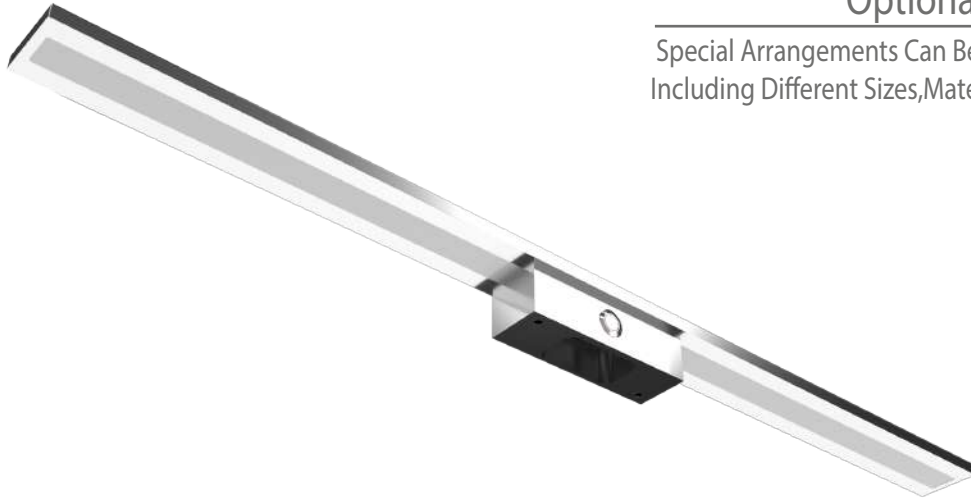

Optional

Main Light And Emergency OR Second Color

Temp Control



Does Not Cause fire





Voltage Limit



Product Specifications

- Power Consumption.....: 6 Watt
- Standart Voltage Internal Driver.....: 24 VDC Protected 60 VDC
- Energy Productivity.....: %85
- Light Source Led.....: Mid Power
- Dimmable.....: PWM, Voltage, Current
- Luminous Flux.....: 675 Lumens

Dimensions

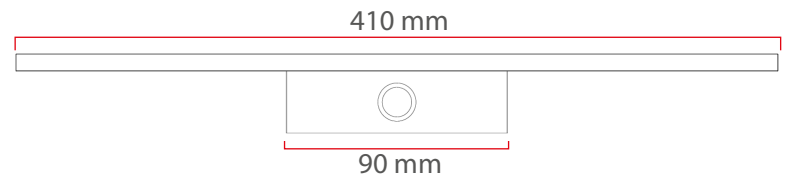


Material Colors



And Other Ral Codes

Light Angle




The Driver Is Protected In An Aluminum Housing


Area Of Application

Interior


Optional Connection




Standart Connection



Finishes

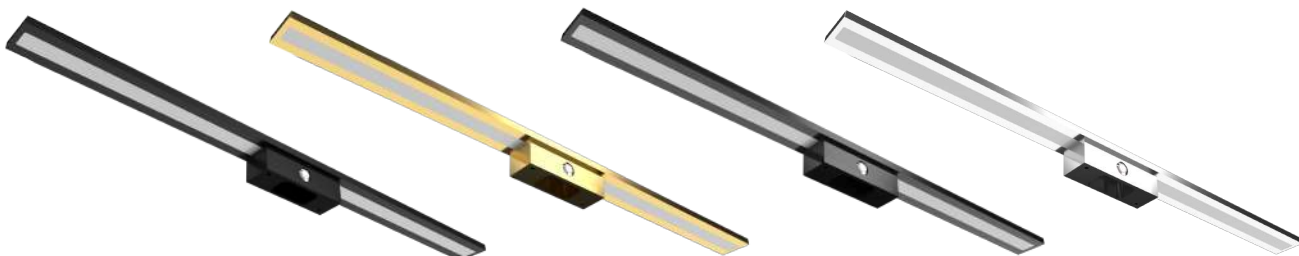

Light Colors




Certifications



Aria 410 V2

!Heat-High Voltage-Peak-Protected
Does Not Produce Frequency Interference

Marine Grade Downlight




STEIN
MARINE LIVING

Mounting




First, loosen the set screws of the lower part to separate it from the other part.

Secure the separated part to the mounting location using two screws at the indicated points.

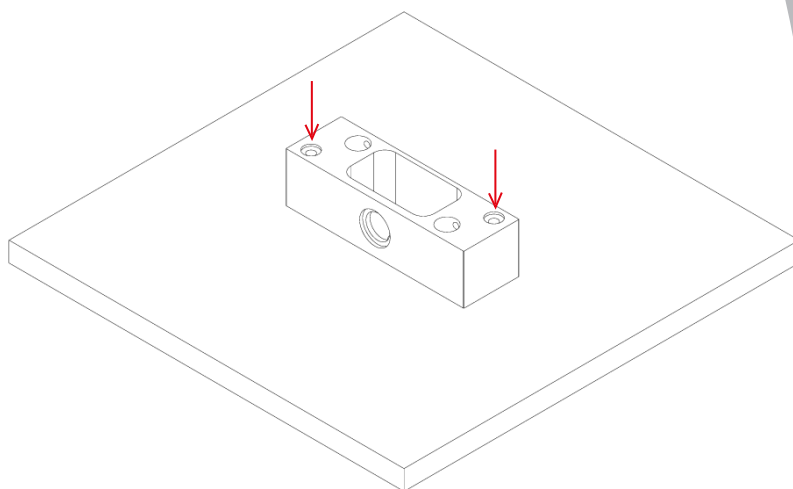

After mounting the part, place the other part back in position and tighten the set screws again.

Light Colors



6500K 3000K RED BLUE GREEN

Certifications

