


Nelly 50X V2-20

!Heat-High Voltage-Peak-Protected
Does Not Produce Frequency Interference

Marine Grade Downlight



STEIN
MARINE LIVING



Optional

Special Arrangements Can Be Made For Projects Including Different Sizes, Materials, Material Colors



Optional

Main Light And Emergency
OR
Second Color

Temp Control



Does Not Cause fire




Voltage Limit




Product Specifications

- Power Consumption.....: 3 Watt
- Standart Voltage Internal Driver.....: 24 VDC Protected 60 VDC
- Energy Productivity.....: %95
- Light Source Led.....: Mid Power OR High Power
- Dimmable.....: PWM, Voltage, Current
- Luminous Flux.....: 420 Lumens

Dimensions

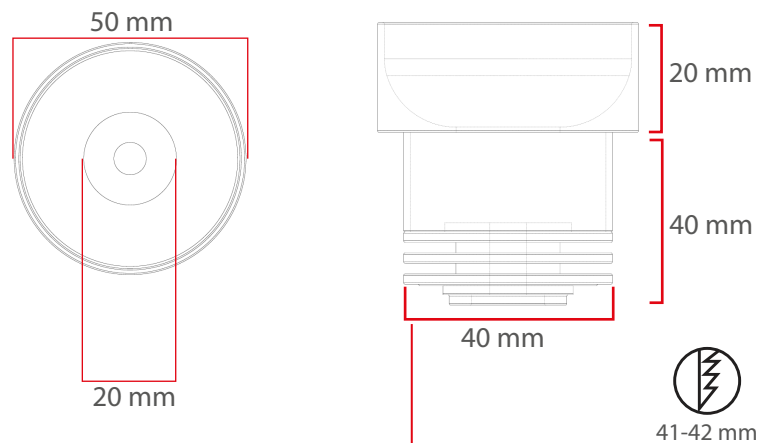

Light Angle



The Driver Is Protected In An Aluminum Housing


Area Of Application
Interior

Material Colors




And Other Ral Codes

Optional Connection




Standart Connection



Finishes



Light Colors



Certifications

