


Nelly 55-15

!Heat-High Voltage-Peak-Protected
Does Not Produce Frequency Interference

Marine Grade Downlight



STEIN
MARINE LIVING



Optional

Special Arrangements Can Be Made For Projects Including Different Sizes, Materials, Material Colors



Optional

Main Light And Emergency OR Second Color

Product Specifications

- Power Consumption.....: 4 Watt
- Standart Voltage Internal Driver.....: 24 VDC Protected 60 VDC
- Energy Productivity.....: %95
- Light Source Led.....: Mid Power OR High Power
- Dimmable.....: PWM, Voltage, Current
- Luminous Flux.....: 560 Lumens

Temp Control




Does Not Cause fire




Voltage Limit



Dimensions

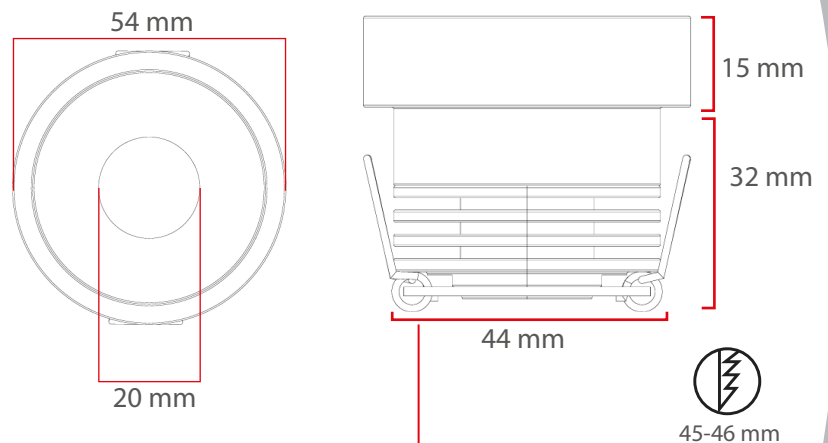


Light Angle




The Driver Is Protected In An Aluminum Housing

Area Of Application
Interior


Material Colors

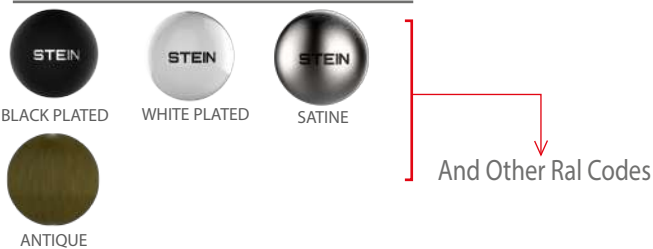

Optional Connection




Standart Connection



Finishes

Light Colors



Certifications

