


Mila 50FX

!Heat-High Voltage-Peak-Protected
Does Not Produce Frequency Interference

Marine Grade Downlight



STEIN
MARINE LIVING



Optional

Special Arrangements Can Be Made For Projects Including Different Sizes, Materials, Material Colors



Optional

Main Light And Emergency
OR
Second Color

Product Specifications

- Power Consumption.....: 4 Watt
- Standart Voltage Internal Driver.....: 24 VDC Protected 60 VDC
- Energy Productivity.....: %95
- Light Source Led.....: Mid Power OR High Power
- Dimmable.....: PWM, Voltage, Current
- Luminous Flux.....: 560 Lumens

Temp Control





Does Not Cause fire




Voltage Limit



Dimensions

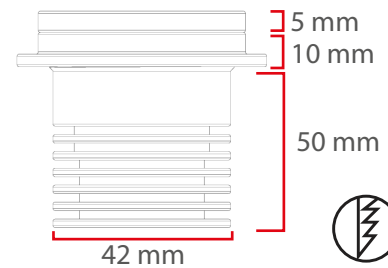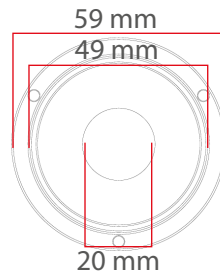


Material Colors

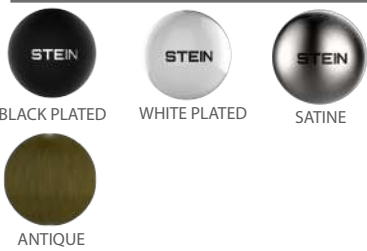


And Other Ral Codes


Mounting




Attach the mounting piece to the panel you drilled into using a screw, and then attach the product to the mounting piece.

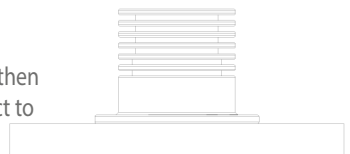


Optional Connection



Standart Connection



Light Angle




The Driver Is Protected In An Aluminum Housing

Area Of Application

Interior

Finishes

Light Colors



Certifications

