

BL 1655-D New High Tech Series

**! Heat - High Voltage - Peak- Protected
Does Not Produce Frequency Interference**

Marine grade downlight



Product Specifications

Power Consumption	: 5 X 2 = 10 Watt
Standart Voltage Internal Driver	: 24 VDC Protected 60 VDC
Optional Driverless	:
Light Source Led	: LED
Dimmable	: PWM, Voltage, Current
Luminous Flux	: 1.400 Lumens

Can
Control Temp



Does Not
Cause fire




High
Voltage Limit



Does Not Cause
Frequency



Dimensions

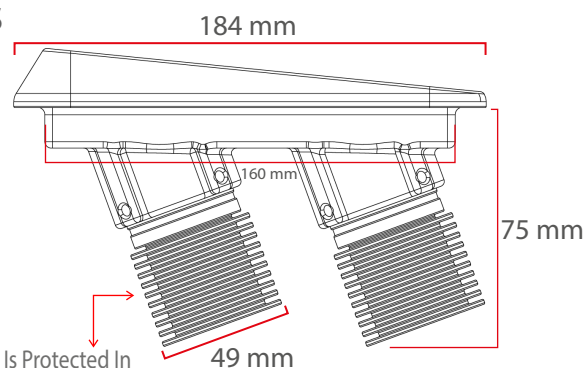

The Driver Is Protected In
An Aluminum Housing

These Dimensions Can Be
Changed Optionally



161 X 56 R3 mm

Material Colors




BLACK PLATED



WHITE PLATED

Light Angle




And Other Ral Codes


Optional Connection



Standart Connection




Mounting

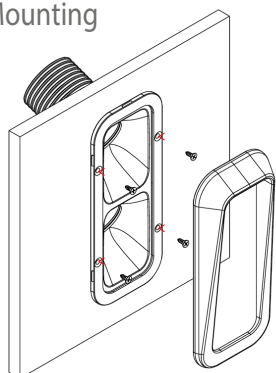


Area Of Application
Exterior

1. Apply insulation material to the hole before placing the product
2. Place the product into the hole you made
3. Secure the product with a screw
4. Attach the cover and apply insulation material underneath (optional)

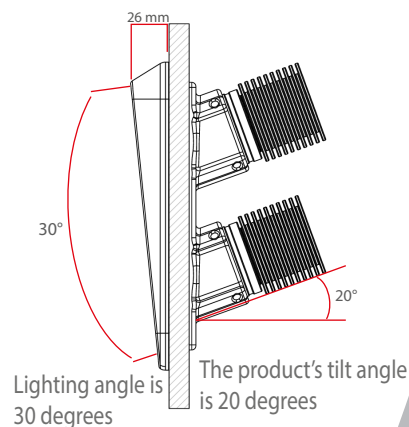

Light Colors



Certifications

