

Mila 60F New High Tech Series

! Heat - High Voltage - Peak- Protected
Does Not Produce Frequency Interference

Marine grade downlight



Optional

Special Arrangements Can Be Made For Projects Including Different Sizes, Materials, Material Colors

Product Specifications

Power Consumption	: 5 Watt
Standart Voltage Internal Driver	: 24 VDC Protected 60 VDC
Protection	: Temperature Control
Light Source Led	: LED
Dimmable	: PWM, Voltage, Current
Luminous Flux	: 600 Lumens

Can Control Temp



Does Not Cause fire




High Voltage Limit



Does Not Cause Frequency




Dimensions

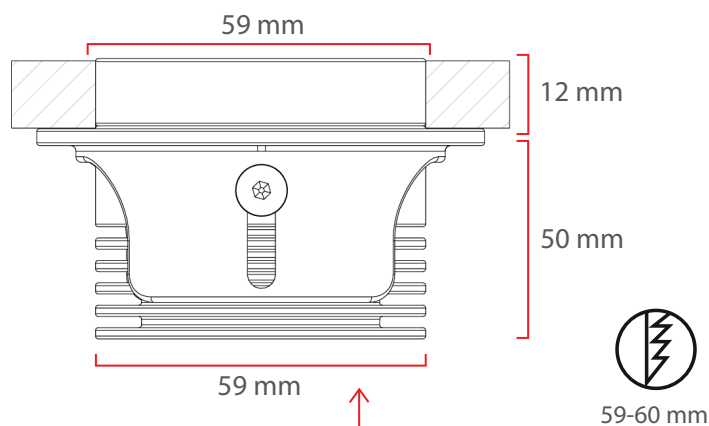

Material Colors



Light Angle




And Other Ral Codes

Optional Connection



Standart Connection




These Dimensions Can Be Changed Optionally

The Driver Is Protected In An Aluminum Housing

Mounting


Area Of Application

IP 40 Interior

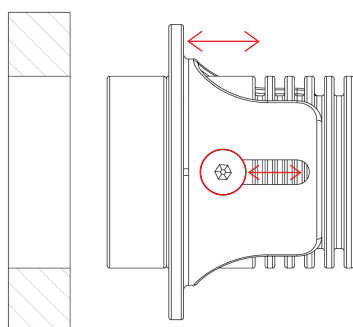

1. Cut the panel with the specified hole diameter.
2. Pass the product through the hole and adjust its height by loosening the screws.
3. Tighten the screws again and mount the installation bracket with a screw.

Light Colors



Certifications

