

Nelly H25-2



STEIN
MARINE LIVING

**!Heat-High Voltage-Peak-Protected
Does Not Produce Frequency Interference**

Marine Grade Downlight

Optional

Special Arrangements Can Be Made For Projects
Including Different Sizes, Materials, Material Colors



Optional

Main Light And Emergency
OR
Second Color


Product Specifications

Power Consumption.....: 4 X 2 = 8 Watt
Standart Voltage Internal Driver.....: 24 VDC Protected 60 VDC
Optional Driverless.....: Current 3 OR 18 V 300 -1.500 ma
Light Source Led.....: Mid Power OR High Power
Dimmable.....: PWM, Voltage, Current
Luminous Flux.....: 1.120 Lumens

Temp Control Does Not Cause fire Voltage Limit Does Not Cause Frequency



Dimensions

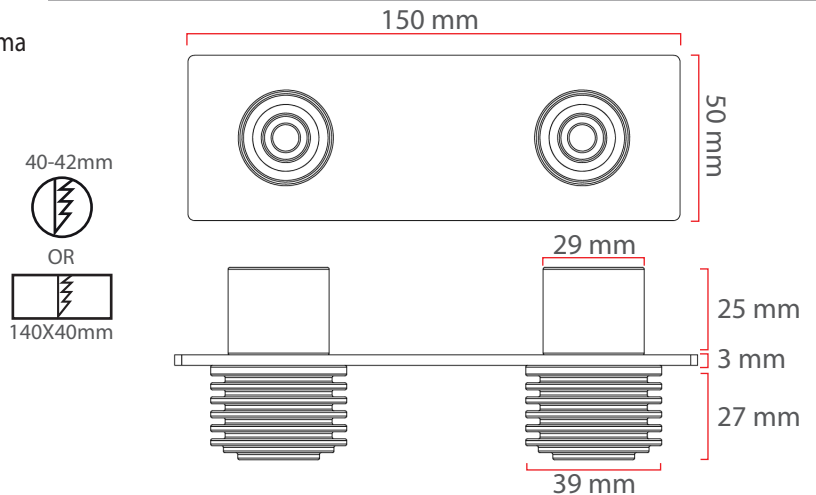

Material Colors



Light Angle



And Other Ral Codes

Optional Connection



Standart Connection



These Dimensions Can Be
Changed Optionally


The Driver Is Protected In
An Aluminum Housing

Area Of Application

IP 40 Interior

IP 65 Exterior

Light Colors



Certifications

