


FOGGY POWER

!Heat-High Voltage-Peak-Protected
Does Not Produce Frequency Interference

Marine Grade Downlight

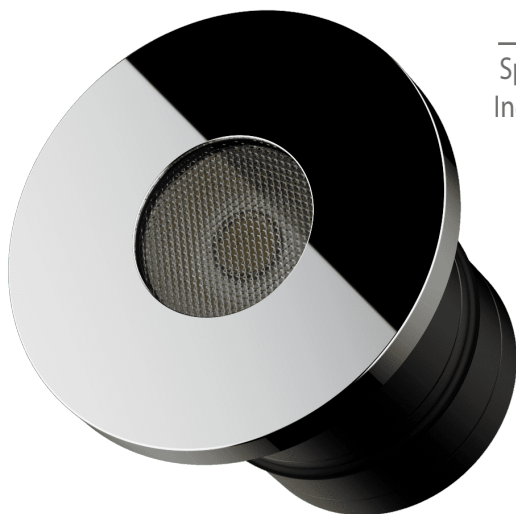

Optional

Special Arrangements Can Be Made For Projects
Including Different Sizes, Materials, Material Colors

Product Specifications

Power Consumption.....: 1.5 Watt
Standart Voltage Internal Driver.....: 24 VDC Protected 60 VDC
Optional Driverless.....: Current 3 OR 18 V 300 -1.500 ma
Light Source Led.....: Mid Power OR High Power
Dimmable.....: PWM, Voltage, Current
Luminous Flux.....: 210 Lumens

Can
Control Temp



Does Not
Cause fire



High
Voltage Limit



Does Not Cause
Frequency




Dimensions

Light Angle




44 mm




40 mm

1.5 mm

20 mm



33 mm



29 mm

4 mm
22 mm

The Driver Is Protected In
An Aluminum Housing



33-34 mm

Area Of Application

Exterior

Material Colors



BLACK PLATED



GOLD PLATED



316 L POLISHED



ANTIQUE



WHITE PLATED




316 L STAIN

And Other Ral Codes


Optional Connection



Standart Connection



Mounting

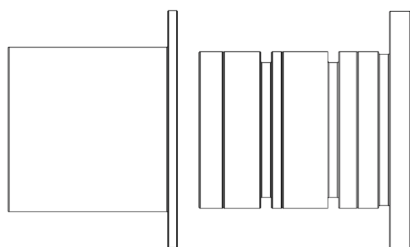

1. Place the mounting accessory of the product into the hole you have drilled.
2. Attach the mounting accessory of the product firmly to the hole.
3. Insert the product into the mounting accessory; it should fit snugly and securely.

Light Colors



6500K



3500K



RED



BLUE



GREEN

Certifications



IP65 CE