

# Read WT S

**!Heat-High Voltage-Peak-Protected  
Does Not Produce Frequency Interference**

Marine Grade Downlight



## Optional

Special Arrangements Can Be Made For Projects  
Including Different Sizes, Materials, Material Colors

## Optional

Main Light And Emergency  
OR  
Second Color

## Product Specifications

Power Consumption.....: 3 Watt

Standart Voltage Internal Driver.....: 24 VDC Protected 60 VDC

Optional Driverless.....: Current 3 Or 18 V 300-1500 ma

Light Source Led.....: Mid Power OR High Power

Dimmable.....: PWM, Voltage, Current

Luminous Flux.....: 300 Lumens

Can  
Control Temp



Does Not  
Cause fire




High  
Voltage Limit



Does Not Cause  
Frequency




## Dimensions

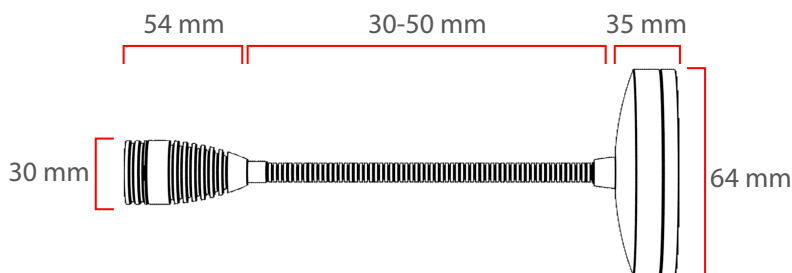

## Material Colors



Light Angle




And Other Ral Codes

## Optional Connection




## Standart Connection



Area Of Application  
Interior

## Light Colors



## Certifications



WT: Wall Type TT: Table Type