

Mila 50S V2 New High Tech Series

**! Heat - High Voltage - Peak- Protected
Does Not Produce Frequency Interference**

Marine grade downlight



STEIN
MARINE LIVING

Optional

Special Arrangements Can Be Made For Projects Including Different Sizes, Materials, Material Colors




Product Specifications

Power Consumption	: 4 Watt
Standart Voltage Internal Driver	: 24 VDC Protected 60 VDC
Protection	: Temperature Control
Light Source Led	: LED
Dimmable	: PWM, Voltage, Current
Luminous Flux	: 480 Lumens

Can Control Temp	Does Not Cause fire	High Voltage Limit	Does Not Cause Frequency

Dimensions

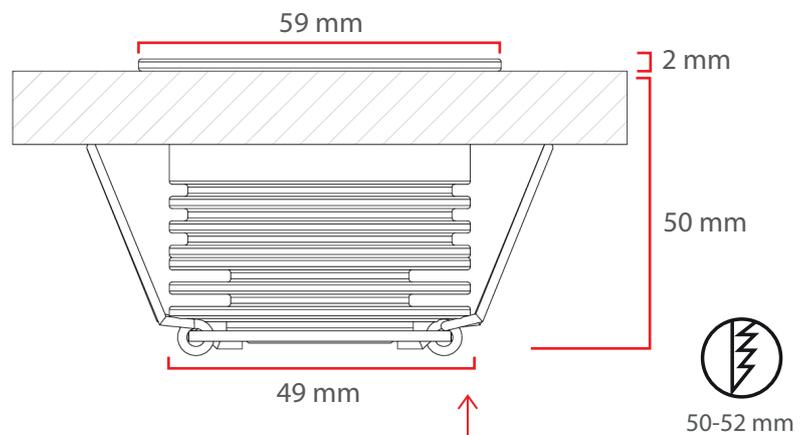


These Dimensions Can Be Changed Optionally

The Driver Is Protected In An Aluminum Housing

Material Colors

			} And Other Ral Codes
BLACK PLATED	TITANIUM PLATED	316 L POLISHED	
ANTIQUE	WHITE PLATED	316 L SATINE	


Light Angle



Optional Connection



Standart Connection



Area Of Application

IP 65 Exterior

Light Colors

6500K	3000K	Red	Blue	Green

Certifications

IP65 CE