

# CR 120-38

!Heat-High Voltage-Peak-Protected  
Does Not Produce Frequency Interference



Marine Grade Downlight



Optional

Special Arrangements Can Be Made For Projects  
Including Different Sizes, Materials, Material Colors

Optional

Main Light And Emergency  
OR  
Second Color

## Product Specifications

Power Consumption.....: 24 Watt

Standart Voltage Internal Driver....: 24 VDC Protected 60 VDC

Optional Driverless.....: Current 3 OR 18 V 300 -1.500 ma

Light Source Led.....: High Power

Dimmable.....: PWM, Voltage, Current

Luminous Flux.....: 5.400 Lumens



Temp Control

Does Not Cause fire

Voltage Limit

Does Not Cause Frequency

## Dimensions

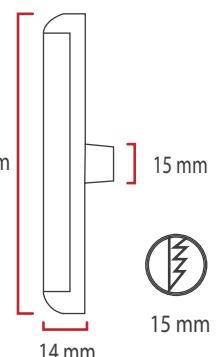

These Dimensions Can Be  
Changed Optionally


The Driver Is Protected In  
An Aluminum Housing

## Material Colors



316 STAINLESS STEEL

Light Angle



And Other Ral Codes

## Optional Connection



## Standart Connection




## Area Of Application

IP 40 Interior

IP 65 Exterior



## Light Colors



## Certifications

