

Mila 60AX New High Tech Series

! Heat - High Voltage - Peak- Protected
Does Not Produce Frequency Interference

Marine grade downlight



STEIN
MARINE LIVING

Optional

Special Arrangements Can Be Made For Projects Including Different Sizes, Materials, Material Colors



Product Specifications

Power Consumption	: 4 Watt
Standart Voltage Internal Driver	: 24 VDC Protected 60 VDC
Protection	: Temperature Control
Light Source Led	: LED
Dimmable	: PWM, Voltage, Current
Luminous Flux	: 480 Lumens

Can Control Temp



Does Not Cause fire



High Voltage Limit




Does Not Cause Frequency



Dimensions


69 mm



48 mm



60-61 mm

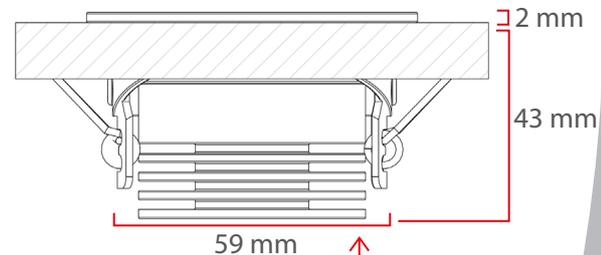

59 mm

These Dimensions Can Be Changed Optionally

The Driver Is Protected In An Aluminum Housing

Material Colors




And Other Ral Codes



Optional Connection



Light Angle




Standart Connection

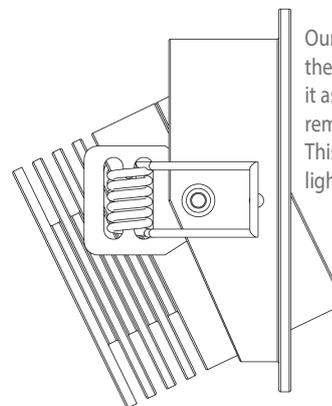

Our product can be easily moved along the horizontal axis. When users position it as desired and release it, the lamp remains xed in that position. This exibility perfectly caters to your lighting needs in any environment.

Light Colors



Certifications

